
#### National Interoperability Field Operations Guide

U.S. Department of Homeland Security Office of Emergency Communications

Version 1.2



March 2008

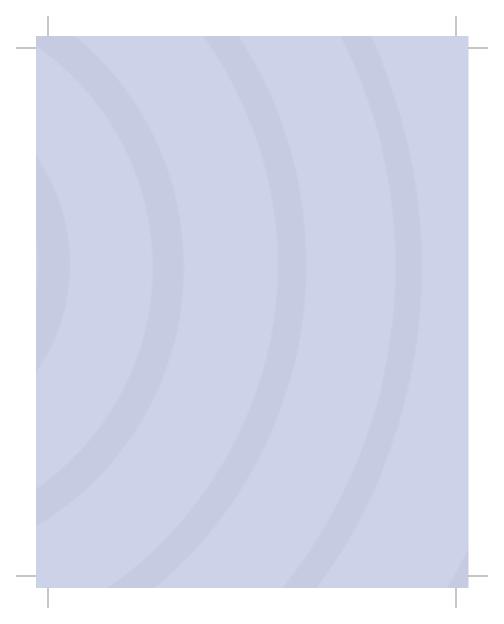

#### INTRODUCTION

The National Interoperability Field Operations Guide (NIFOG) is a collection of technical reference material for radio technicians responsible for radios that will be used in disaster response applications. The NIFOG includes information from the National Interoperability Frequency Guide (NIFG), the instructions for use of the NIFG, and other reference material; formatted as a pocket-sized guide for radio technicians to carry with them.

If you are not familiar with interoperability and mutual aid communications, start with the "How to Use the National Interoperability Field Operations Guide" section.

We encourage you to program as many of these interoperability channels in your radios as possible. Even if geographic restrictions on some channels preclude their use in your home area, you may have the opportunity to help in a distant state where the restrictions do not apply. Maximize your flexibility.

This version (1.2) contains updated information pertaining to both the OEC program office, and communication channels.

Please send comments about the NIFOG to OEC@HQ.DHS.GOV

Thank you.

Chris Essid, Director,

**DHS Office of Emergency Communications** 

#### TABLE OF CONTENTS

How to Use the National Interoperability Field Operations Guide	1
Recommendations for Programming the Federal Interoperability Channels	
REGULATIONS AND GUIDELINES FOR NATIONAL INTEROPERABILITY	16
Conditions for use of Federal Interoperability Channels	17
Law Enforcement Plans	
Incident Response Plans	
FCC Rules and Regulations	20
NTIA Rules and Regulations	20
INTEROPERABILITY CHANNELS	21
Non-Federal VHF National Interoperability Channels	21
Non-Federal VHF Inland Interoperability Channels	
Non-Federal UHF National Interoperability Repeater Channels	
700 MHz Interoperability Channels (Proposed)	
Non-Federal 800 MHz National Mutual Aid Repeater Channels	28
VHF Incident Response (IR) Federal Interoperability Channel Plan	29
UHF Incident Response (IR) Federal Interoperability Channel Plan	30
VHF Law Enforcement (LE) Federal Interoperability Channel Plan	31
UHF Law Enforcement (LE) Federal Interoperability Channel Plan	
Federal / Non-Federal SAR Command Interoperability Plan	
Federal / Non-Federal VHF SAR Operations Interoperability Plan	34
VHF Public Safety Mutual Aid and Common Channels	
UHF MED Channels	36
NOAA Weather Radio "All Hazards" Broadcasts	37
COMMON COMMUNICATIONS REFERENCES	38
Operations Center Telephone Numbers	38
Emergency Support Functions (ESF)	39

CTCSS Tones	40
DCS Codes	41
P25 Digital Codes	42
RS-232 Connectors (DB25 and DB9)	43
Telephone Connectors	44
RJ-45 Wiring	45
Color Codes for T568B	
Telephone Block Wiring	46
Telephone Keypad Letters	47
Wireless Priority Service (WPS)	47
DSN Area Codes	47
Satellite Phone Dialing Instructions	48
INMARSAT-A Service Codes	50
INMARSAT-M Service Codes	51
GETS - Govt. Emergency Telecomm. Service	52
COMMONLY USED FREQUENCIES	53
Aviation Frequencies	53
Marine Frequencies	
Multi-Use Radio Service (MURS)	57
GMRS Frequencies	
FRS Frequencies	58
CB Frequencies	58
Common Business Frequencies	59
Railroad Frequencies	60
SAR (Search And Rescue) Frequencies	61
NOTES	62

# How to Use the National Interoperability Field Operations Guide

# What is the "National Interoperability Field Operations Guide"?

communicators. It is based on the "National Interoperability Frequency Guide" where radio interoperability is required, and other information useful to emergency of land mobile radio (LMR) frequencies that are often used in disasters or other incidents The "National Interoperability Field Operations Guide" (NIFOG) is a pocket-sized listing

Terms used in this document:

- FCC Federal Communications Commission
- FCC Rules contained in Title 47, Code of Federal Regulations (47CFR)
- Federal used herein to differentiate between radio stations of the United States than non-Government, the term "Federal" is used possible confusion of State government officials thinking they are Government rather The NTIA Manual uses the terms "Government" and "non-Government". To avoid the Government and those of any State, tribal, local, or regional governmental authority.
- NCC the Public Safety National Coordination Committee (NCC), a Federal Advisory with the National Coordinating Center for Telecommunications, also known as NCC Committee formed by the FCC to advise it on interoperability – not to be confused

- http://www.npstc.org/channelNaming.jsp nomenclature. NPSTC channel IDs used in the NIFOG are based on the NPSTC NCC expired, NPSTC continued NCC's efforts to establish a common channel and interoperability through collaborative leadership. After the charter for the of organizations whose mission is to improve public safety communications NPSTC – the National Public Safety Telecommunications Council is a federation Channel Naming Report, dated 6/13/2007; see
- NTIA National Telecommunications and Information Administration
- NTIA Manual The NTIA "Manual of Regulations and Procedures for Federal Radio Frequency Management" http://www.ntia.doc.gov/osmhome/redbook/redbook.html

#### How is the NIFOG used?

waiting until a disaster is imminent or occurring to do the programming We recommend having these channels programmed in radios at all times rather than The NIFOG may be used by radio technicians when programming channels in radios.

The NIFOG may also be of use to emergency communications planners.

### into radios? Don't I need a license for these channels before programming them

program the trequencies into radios only to TRANSMIT on an LMR radio frequency. No license or authorization is required to A license (for non-Federal radio users) or an authorization (for Federal users) is required

# How can I use these frequencies if I don't have a license for them?

There are six ways you can legally use these radio frequencies

- You or your employer may already have a Federal Communications Commission authority's license (NTIA) authorization for some of these frequencies, or may be covered by a higher (FCC) license or a National Telecommunications and Information Administration
- 2 paragraph 90). stations still require individual licenses (see FCC 00-348, released 10/10/2000 authorization" from the FCC for mobile operation, but base stations and control UCALL40-UCALL43D, and 8CALL90-8TAC94D are covered by a "blanket The non-Federal National Interoperability Channels VCALL10-VTAC14

- In extraordinary circumstances, the FCC may issue a "Special Temporary Authority" (STA) for such use in a particular area
- 4 such use in a particular area. In extraordinary circumstances, the NTIA may issue a "Temporary Assignment" for
- S subjects you or your employer to FCC fines and/or possible license revocation these Federal channels is done under the auspices of your FCC license; any misuse stations - these are not a substitute for your regular mutual aid channels. Your use of use these channels for interoperability with other State, tribal, regional, or local radio the purpose of interoperability with Federal Government radio stations. You may not Government radio station authorized by the NTIA to use those channels, and only for If you are an FCC licensee, you may operate a mobile station on the Federal Interoperability Channels only when invited or approved to do so by a Federal
- <u>ග</u> When necessary for the IMMEDIATE protection of life or property, radio users may use prudent measures beyond the specifics of their license

#### (FCC rules)

### 90.407 Emergency communications.

authorized facilities. [49 FR 36376, Sept. 17, 1984] Commission may at any time order the discontinuance of such special use of the or in the rules and regulations governing the operation of such stations. The communications in a manner other than that specified in the station authorization emergency in which the normal communication facilities are disrupted as a result of hurricane, flood, earthquake or similar disaster, utilize such station for emergency The licensee of any station authorized under this part may, during a period of

### 90.411 Civil defense communications.

[49 FR 36376, Sept. 17, 1984] discontinuance of such special use of the authorized facilities emergency, including drills and tests. The Commission may at any time order the assigned such station by local civil defense authorities during an actual or simulated transmit communications necessary for the implementation of civil defense activities The licensee of any station authorized under this part may, on a voluntary basis

#### (NTIA rules)

### 7.3.1 Emergency Communications

- or on other appropriate frequencies under the following special circumstances: frequencies in a manner other than that specified in the terms of an existing assignment In an emergency it is permissible to operate temporarily on regularly assigned
- An emergency must actually exist or imminently threaten. An emergency for the property and in connection with which special communication facilities are required welfare of a community or of an area to the extent of endangering human life and or indirectly from a natural catastrophe or other occurrence that seriously affects the purpose of this provision means a situation of temporary duration resulting directly normal communication facilities are restored temporarily. Emergency operations shall be discontinued as soon as substantially

## 7.3.4 Emergency Use of Non-Government Frequencies

following conditions stations and is directly related to the emergency at hand. Such use is subject to the Regulations, when such use is necessary for communications with non-government authorized to a non-government radio station, under Part 90 of the FCC Rules and In emergency situations a government radio station may utilize any frequency

- The non-government licensee has given verbal or written concurrence
- b. Operations are conducted in accordance with the FCC Rules and Regulations
- c. Use is restricted to the service area and station authorization of the licensee
- All operations are under the direct control of the licensee and shall be immediately terminated when directed by the licensee.
- e. Operations do not exceed 60 days.
- f. A written report of each such use shall be provided, through the agency's FAS representative, to the FCC as soon as practicable

# 7.5.2 Frequencies Authorized by the FCC for Ship Stations

Frequencies authorized by the Federal Communications Commission for ship stations may be used by Government mobile stations to communicate with non-Government stations in the maritime mobile service

## 7.5.3 Frequencies for the Safety of Life and Property

other channel information is not available and for emergency communications. This The frequency 40.5 MHz is designated as the military joint common frequency. Use frequency also may be used for search and rescue communications. of this channel is limited to communications necessary to establish contact when

its position, and obtain help. (See ITU Radio Regulation Ap. 13 Part A1, § 3,1.) in distress from using any frequency at its disposal to attract attention, make known The provisions of this Manual do not prevent mobile stations, or mobile earth stations.

# 7.5.4 Frequencies for Coordinating Search and Rescue Operations

- coordinated search and rescue operations the aeronautical mobile service and by other mobile and land stations engaged in The frequency 123.1 MHz, using class A3E emission, may be used by stations of
- that coast station and aircraft stations, using G3E emission, engaged in coordinated search and rescue The frequency 156.3 MHz may be used for communications between ship stations Guard coast station, 156.3 MHz may be used by ship stations to communicate with (SAR) operations. When control of the scene of a SAR incident is under a Coast

## Does the NIFOG authorize me to use certain frequencies?

authority can come only from the FCC or the NTIA. NO. The NIFOG does not grant authority to operate on any radio frequencies. Such

# Is the NIFOG the national emergency communications plan?

The NIFOG is the national guide for possible use in a situation where no other radio

which frequencies to use to make initial contact contact with other emergency responders, the NIFOG provides useful suggestions for dispatched to a disaster or incident scene and have no other information on how to make any Federal, State, tribal, local, or regional emergency communications plan. If you are interoperability arrangement was promulgated by local authorities, or where emergency responders are unaware of such an arrangement. The NIFOG does NOT supersede

## Are these frequencies clear for this use nationwide?

the NIFOG due to authorized on-channel uses that are different than the common uses described in not be usable due to the potential for adjacent channel interference in some areas, or Inland Mutual Aid Channels" section for further details). Other channels in this plan may the map titled "Interoperability Frequencies in VPCs 10 - 42" in the "Non-Federal VHF certain inland parts of the country, away from coastal areas and major waterways (see particular, the "Non-Federal VHF Inland Interoperability Channels" may only be used in Not all frequencies are available nationwide for use as described in the NIFOG. In

http://www.fcc.gov/oet/info/maps/areas/cnty1990/vpccnty1990.txt For a detailed list of which counties are in which VHF Public Coast (VPC) area, see:

## Who do I contact to use these channels?

for all command and control questions Before then, try the calling channels specified in the NIFOG at or near the incident scene closely. Check with ESF #2 or the JFO Communications Unit once they are established be significant overlap, ESF #2 and the JFO Communications Unit will work together very requirements for the emergency responders working through the JFO. Because there will communications industry; the JFO Communications Unit handles the communications Manager. ESF #2 works on communications issues affecting the victims and the telein the Operations Section ESF #2 will have personnel filling the role of Spectrum needed. At a Federally-declared disaster where a Joint Field Office (JFO) is established, coordinating with the FCC and NTIA for authorization to use additional channels if there should be a "Frequency Manager" assigning functions to radio channels, and authorized under an STA. As part of any coordinated disaster or incident response These channels can be used where licensed/authorized by FCC/NTIA, or where

# Does the NIFOG specify exactly how to program channels?

used by drawbridge tenders may be appropriate; see use when properly authorized), based on local or regional use. In particular, channels programming additional VHF Marine channels as possible interoperability channels (for suggest "SAR WFM" for wideband and "SAR NFM" for narrowband. Also, we recommend VFIRE23 on the same frequencies. For the SAR common channel at 155.160 MHz, we to the NPSTC narrowband channels VLAW31, VMED28, VFIRE22, VFIRE21, and VFIRE22W, VFIRE21W, and VFIRE23W as the wideband channel names corresponding with different bandwidths. For the legacy police, EMS, and fire mutual aid channels NPSTC nomenclature does not always address how to label the same frequencies channels used are wideband in some jurisdictions, but narrowband in others. The be programmed so both modes would be available. Some of the common mutual aid to enable or disable receive CTCSS; for those radios that don't, another channel could feature would save memory slots. Similarly, some radios may have a switch or button 6/13/2007. For most of the channels, the NPSTC nomenclature specifies a "direct" solution. The NIFOG relies to a large part on the NPSTC Channel Naming Report dated Since not all radios are the same, it's impossible to come up with a one-size-fits-all 155.475, 155.340, 154.265, 154.280 and 154.295, we suggest VLAW31W, VMED28W, radios have a switch which permits talk-around on a repeater channel. Using this ("talk-around") channel for repeaters which takes up an additional memory slot. Some

http://www.navcen.uscg.gov/marcomms/vhf.htm for frequencies http://wireless.fcc.gov/marine/vhfchanl.pdf for authorized channel uses and http://wireless.fcc.gov/marine/vhfchanl.html or

to enable or disable CTCSS on receive by a switch or button; otherwise use CSQ on carrier squelch (CSQ, no CTCSS) should be used on receive. Consider allowing the user channels, NAC \$68F. CTCSS should always be transmitted on the analog channels, but LE 1, LE B, LE 10, and LE 16 (CTCSS 167.9 Hz); use P25 digital for the remaining LE Incident Response channels (CTCSS 167.9 Hz) and Law Enforcement channels LE A, Recommended modes for using Federal Interoperability Channels: use analog for all

### programmed, and vice versa? Should Fire/EMS radios have the Law Enforcement interoperability channels

Law Enforcement activities, and if assigned by the agency in control of the incident but could be designated for other incident support operations if that would not hamper "Law Enforcement" (LE) channels will be used "primarily" for Law Enforcement activities; everybody - Fire, Rescue, EMS, Public Works, Transportation, Law Enforcement, etc. The as well. On the Federal interoperability channels, "Incident Response" (IR) means possible. Interoperability means crossing over lines, not only jurisdictional but functional All radios should have as many of these interoperability channels programmed as

## How do emergency responders use the calling channels?

Response Federal Interoperability Channel is known as "NC 1 Calling" (or "NC 1CALL"). channel exists as a distinct channel on the radio. For example, the VHF Incident or "talk-around" mode if your radio has that capability. In some cases, the talk-around calling channels. If it is a repeater channel and you get no response, try the "direct" As you approach the incident scene, attempt to make contact on one of the designated The talk-around for this repeater channel is known as "IR 5"

traffic on one of these channels. to use them, or if your situation qualifies as "IMMEDIATE protection of life or property" these channels, consider the wideband interoperability channels – if you are authorized "NC 2 Calling" (direct: "IR 15"), "LE A", and "LE B". If you are unable to make contact on 8CALL90) and the Federal IR and LE calling channels: "NC 1 Calling" (direct: "IR 5"), You may be able to learn what you need without transmitting, by just listening to radio Try the non-Federal national interoperability calling channels (VCALL10, UCALL40, and

coordinate by radio? How do Search and Rescue personnel on land, on watercraft, and on aircraft

communicate with each other to coordinate rescues. There is no VHF channel authorized (SAR) interoperability. Searchers on land, in boats, and in aircraft need to be able to Certain VHF Marine channels are designated in this plan for Search and Rescue authorized channels in their radios and to exercise great restraint in using these channels only when encourage SAR organizations with VHF radios to program the appropriate VHF Marine entities to obtain licenses for this frequency to facilitate interoperability. Likewise, we Also, 155.16 MHz is licensed to many SAR organizations. We encourage public safety they are in this plan due to the likelihood of boats being involved in SAR in coastal areas. channels shall not be used for conventional, terrestrial search and rescue operations – participants have the channels in this plan pre-programmed in their radios. VHF Marine are capable of covering the VHF Marine frequencies. We recommend that all SAR Marine radios, as do most boaters; the VHF radios that many ground SAR groups use and readily available to all three communities. Some aircraft involved in SAR have VHF

Operations Guide", or how can I offer suggestions to improve it? How can I get answers to questions about the "National Interoperability Field

agency or organization affiliation, and your e-mail address Office of Emergency Communications, at OEC@HQ.DHS.GOV and include your name, Please send your questions or comments to the U.S. Department of Homeland Security,

#### Recommendations for Programming the Federal Interoperability Channels

- If there is enough room in your radio, program all channels as analog and again as digital channels. If not, program as follows:
- a. IR channels all analog.
- b. LE channels program all as P25 digital with NAC \$68F except LE A, LE 1, LE B, LE10, and LE 16 which are to be programmed analog with Tx CTCSS 167.9 Hz (6Z) and no Rx CTCSS (carrier squelch, CSQ)
- If your radio has a user-selectable option to enable/disable CTCSS on receive, you tone used on transmit for receive. The default configuration should be CSQ receive may choose to configure this option so that the user can enable the same CTCSS

when these are used for state/state, state/local, or local/local interoperability. A Federal entity must be involved Note on using the Federal Interoperability Channels: These channels may not be used

## REGULATIONS AND GUIDELINES FOR NATIONAL INTEROPERABILITY

- The FCC and NTIA rules allow for some flexibility in frequency use by personnel directly involved in a situation where human life or property are endangered This does NOT mean "In an emergency, anything goes
- For communications not covered by #1, your use of a radio frequency must be a. Your (or your agency's) FCC license or NTIA authorization authorized by:
- b. "License by rule" a provision in FCC rules that authorizes use of a radio frequency under specified conditions without a specific license or authorization
- c. A "Special Temporary Authorization" provided by FCC or NTIA. issued to the user
- Digital P25 operations on non-Federal interoperability channels should transmit the default Network Access Code (NAC) \$293, and receive with NAC \$F7E (accept any incoming NAC). Specify talkgroup \$FFFF, which includes everyone
- Default modes for using Federal Interoperability Channels: use analog for all Incident LE 16; use P25 Digital for the remaining LE channels, NAC \$68F. Response channels and Law Enforcement channels LE A, LE 1, LE B, LE 10, and

## Conditions for use of Federal Interoperability Channels

- The "VHF Incident Response (IR) Federal Interoperability Channel Plan", the response interoperability requirements. These frequencies will be referred to tor use by all Federal agencies to satisfy law enforcement and public safety incident "UHF Incident Response (IR) Federal Interoperability Channel Plan", the "VHF hereinafter as "Federal Interoperability Channels" Enforcement (LE) Federal Interoperability Channel Plan" show frequencies available Law Enforcement (LE) Federal Interoperability Channel Plan", and the "UHF Law
- have a requirement to operate. and between Federal agencies and non-federal entities with which Federal agencies The Federal Interoperability Channels are available for use among Federal agencies
- administrative uses restricted to interoperability communications and are not authorized for routine or harmful interference will not be caused to Federal stations. These channels are operations for law enforcement and incident response, subject to the condition that The channels are available to non-federal entities to enable joint Federal/non-federal
- 4. with NTIA may be required to resolve these conflicts in some areas. Extended operations and congestion may lead to frequency conflicts. Coordination
- Ġ Only narrowband emissions are to be used on the Federal Interoperability Channels.

- Equipment used (transmitters and receivers) must meet the standards established in Section 5.3.5.2 of the NTIA Manual
- a. TIA/EIA 603-B for narrowband analog;
- b. TIA TSB 102, CAAB-A for narrowband digital
- A complete listing of conditions for use by Federal users can be found in Section 4.3.16 of the NTIA Manual.

#### Law Enforcement Plans

- Frequencies 167.0875 MHz and 414.0375 MHz are designated as National Calling Enforcement Federal Interoperability Channel Plans Channels for initial contact and will be identified in the radio as indicated in the Law
- Initial contact communications will be established using narrowband analog FM emission (11KF3E).

ယ

Network Access Code (NAC) \$68F indicated in the Law Enforcement Federal Interoperability Channel Plans with Continuous Tone-Controlled Squelch Systems (CTCSS) frequency 167.9 Hz and/or The interoperability channels will be identified in mobile and portable radios as

#### Incident Response Plans

- Frequencies 169.5375 MHz (paired with 164.7125 MHz) and 410.2375 MHz (paired and will be identified in the radio as indicated in the Incident Response Federal with 419.2375 MHz) are designated as the calling channels for initial contact Interoperability Channel Plans
- Initial contact will be established using narrowband analog FM emission (11K0F3E).
- To ensure access by stations from outside the normal area of operation, Continuous Tone-Controlled Squelch Systems (CTCSS) will not be used on the calling channels
- "UHF Incident Response (IR) Federal Interoperability Channel Plan The interoperability channels will be identified in mobile and portable radios as indicated in the "VHF Incident Response (IR) Federal Interoperability Channel Plan" and the

#### FCC Rules and Regulations

(Title 47, Code of Federal Regulations, Parts 0-199)

#### http://wireless.fcc.gov/rules.html

Maritime Services

For information on VHF Marine channels, see

http://www.navcen.uscg.gov/marcomms/vhf.htm

Part 90 Private Land Mobile Radio Services

**Aviation Services** 

Personal Radio Services (includes GMRS, FRS, CB, & MURS)

Part 95 Part 97 Amateur Radio Service

#### **NTIA Rules and Regulations**

(Title 47, Code of Federal Regulations, Part 300)

http://www.ntia.doc.gov/osmhome/redbook/redbook.html

### **INTEROPERABILITY CHANNELS**


Non-Fe	ederal VHF Nation	Non-Federal VHF National Interoperability Channels	nnels
Description	NPSTC ID	Channel (MHz)	CTCSS Tone ±
	VHF L	VHF Low Band	
Law Enforcement	LLAW1	39.4600	CSQ /156.7 (5A)
Fire (Proposed)	LFIRE2	39.4800	
Law Enforcement	LLAW3	45.8600	
Fire	LFIRE4	45.8800	
	1	VHF	
Calling	VCALL10	155.7525 base/mobile	CSQ /156.7 (5A)
Tactical	VTAC11 *	151.1375 base/mobile	CSQ /156.7 (5A)
Tactical	VTAC12 *	154.4525 base/mobile	CSQ /156.7 (5A)
Tactical	VTAC13	158.7375 base/mobile	CSQ /156.7 (5A)
Tactical	VTAC14	159.4725 base/mobile	CSQ /156.7 (5A)

\*VTAC11 and VTAC12 may not be used in PR/VI.

without reprogramming the radio, the indicated CTCSS tone should also be programmed for receive, and the user instructed how and when to enable/disable. ±Default operation should be carrier squelch receive, CTCSS transmit. If the user can enable/disable

Non-Fed	Non-Federal VHF Inland Interoperability Channels	d Interoperab	ility Channels	
Description	NPSTC ID	Mobile TX (MHz)	Mobile RX (MHz)	VHF Marine Channel
Tactical – wideband FM	VTAC17	157.2500	161.8500	25
Tactical – wideband FM	VTAC17D	161.8500	161.8500	
Tactical – wideband FM	VTAC18	157.2250	161.8250	84
Tactical – wideband FM	VTAC18D	161.8250	161.8250	
Tactical – wideband FM	VTAC19	157.2750	161.8750	85
Tactical – wideband FM	VTAC19D	161.8750	161.8750	

enable/disable CTCSS without reprogramming the radio, the indicated CTCSS tone should also be public coast & public safety licensees page. In these authorized areas, interoperability communications have priority over grandfathered channel 84 (22 areas), and channel 85 (11 areas). Use only where authorized. See map on next in flight. These channels use wideband FM, and are available only in certain inland areas at least HAAT 15 feet max. These channels are for tactical use, and may not be operated on board aircraft Base stations: 50 watts max, antenna HAAT 400 feet. max. Mobile stations: 20 watts max, antenna programmed for receive, and the user instructed how and when to enable/disable. Default operation should be carrier squelch receive, CTCSS 156.7(5A) transmit. If the user can 100 miles from a major waterway. These channels are VHF Maritime channel 25 (all 33 areas),

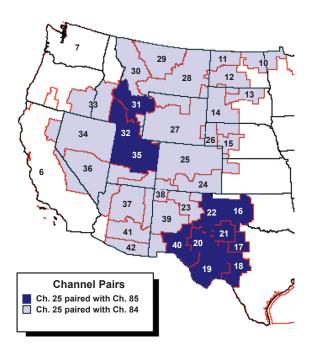

#### Interoperability Frequencies in VPCs 10 - 42

(VPC = VHF Public Coast area)

Non-Federa	I UHF National Inter	Non-Federal UHF National Interoperability Repeater Channels	er Channels
Description	NPSTC ID	Mobile TX (MHz)	Mobile RX (MHz)
Calling	UCALL40	458.2125	453.2125
Calling	UCALL40D	453.2125	453.2125
Tactical	UTAC41	458.4625	453.4625
Tactical	UTAC41D	453.4625	453.4625
Tactical	UTAC42	458.7125	453.7125
Tactical	UTAC42D	453.7125	453.7125
Tactical	UTAC43	458.8625	453.8625
Tactical	UTAC43D	453.8625	453.8625

Default operation should be carrier squelch receive, CTCSS 156.7(5A) transmit. If the user can enable/disable CTCSS without reprogramming the radio, the indicated CTCSS tone should also be programmed for receive, and the user instructed how and when to enable/disable.

700 MH	z Interoperabilit	y Channels (Pro	oposed)
FCC C	hannel		
(Subscrib	oer Load)	Primary Use	NPSTC ID
Receive Ch.	Transmit Ch.		
23-24	983-984	General Public	7TAC51
	23-24	Safety	7TAC51D
39-40	999-1000	Calling	7CALL50
	39-40	Channel	7CALL50D
63-64	1023-1024	EMS	7MED65
	63-64		7MED65D
79-80	1039-1040	EMS	7MED66
	79-80		7MED66D
103-104	1063-1064	General Public	7TAC2
	103-104	Safety	7TAC52D
119-120	1079-1080	General Public	7TAC55
	119-120	Safety	7TAC55D
143-144	1103-1104	Fire	7FIRE63
	143-144		7FIRE63D
159-160	1119-1120	Fire	7FIRE64
	159-160		7FIRE64D
183-184	1143-1144	General Public	7TAC53
	183-184	Safety	7TAC53D
199-200	1159-1160	General Public	7TAC56
	199-200	Safety	7TAC56D
223-224	1183-1184	Law	7LAW61
	223-224	Enforcement	7LAW61D

	hannel per Load)	Primary Use	NPSTC ID
Receive Ch.	Transmit Ch.	1 mary ooc	INI OTO ID
239-240	1199-1200	Law	7LAW62
	239-240	Enforcement	7LAW62D
263-264	1223-1224	General Public	7TAC54
	263-264	Safety	7TAC54D
279-280	1239-1240	Mobile Data	7DATA69
	279-280		7DATA69D
303-304	1263-1264	Mobile Repeater	7MOB59
	303-304		7MOB59D
319-320	1279-1280	Other Public	7GTAC57
	319-320	Service	7GTAC57D
641-642	1601-1602	EMS	7MED86
	641-642		7MED86D
657-658	1617-1618	General Public	7TAC71
	657-658	Safety	7TAC71D
681-682	1641-1642	Calling	7CALL70
	681-682	Channel	7CALL70D
697-698	1657-1658	EMS	7MED87
	697-698		7MED87D
721-722	1681-1682	Fire	7FIRE83
	721-722		7FIRE83D
737-738	1697-1698	General Public	7TAC72
	737-738	Safety	7TAC72D

	hannel per Load)	Primary Use	NPSTC ID
Receive Ch.	Transmit Ch.		
761-762	1721-1722	General Public	7TAC75
	761-762	Safety	7TAC75D
777-778	1737-1738	Fire	7FIRE84
	777-778		7FIRE84D
801-802	1761-1762	Law	7LAW81
	801-802	Enforcement	7LAW81D
817-818	1777-1778	General Public	7TAC73
	817-818	Safety	7TAC73D
841-842	1801-1802	General Public	7TAC76
	841-842	Safety	7TAC76D
857-858	1817-1818	Law	7LAW82
	857-858	Enforcement	7LAW82D
881-882	1841-1842	Mobile Repeater	7MOB79
	881-882		7MOB79D
897-898	1857-1858	General Public	7TAC74
	897-898	Safety	7TAC74D
921-922	1881-1882	Mobile Data	7DATA89
	921-922		7DATA89D
937-938	1897-1898	Other Public	7GTAC77
	937-938	Service	7GTAC77D

Non-Fe	deral 800 MI	Non-Federal 800 MHz National Mutual Aid Repeater Channels	peater Channels
Description	NPSTC ID	Mobile TX (MHz)	Mobile RX (MHz)
Calling	8CALL90	821.0125 (806.0125*)	866.0125 (851.0125*)
Calling - Direct	8CALL90D	866.0125 (851.0125*)	866.0125 (851.0125*)
Tactical	8TAC91	821.5125 (806.5125*)	866.5125 (851.5125*)
Tactical - Direct	8TAC91D	866.5125 (851.5125*)	866.5125 (851.5125*)
Tactical	8TAC92	822.0125 (807.0125*)	867.0125 (852.0125*)
Tactical - Direct	8TAC92D	867.0125 (852.0125*)	867.0125 (852.0125*)
Tactical	8TAC93	822.5125 (807.5125*)	867.5125 (852.5125*)
Tactical - Direct	8TAC93D	867.5125 (852.5125*)	867.5125 (852.5125*)
Tactical	8TAC94	823.0125 (808.0125*)	868.0125 (853.0125*)
Tactical - Direct	8TAC94D	868.0125 (853.0125*)	868.0125 (853.0125*)

enable/disable CTCSS without reprogramming the radio, the indicated CTCSS tone should also Default operation should be carrier squelch receive, CTCSS 156.7(5A) transmit. If the user can \*The frequency in parenthesis, which is 15 MHz lower, will be the frequency used after rebanding. be programmed for receive, and the user instructed how and when to enable/disable.

VHF Incident Response (IR) Federal Interoperability Channel Plan	nse (IR) Fede	eral Interopera	bility Channel	Plan
Assignment (subject to availability & local plans)	NTIA ID	Note	Mobile TX(MHz)	Mobile RX(MHz)
Incident Calling	NC 1 Calling	NC 1CALL	164.7125	169.5375
Incident Command 1	IR 1		165.2500	170.0125
Medical Evacuation Control	IR 2		165.9625	170.4125
Logistics Control	IR 3		166.5750	170.6875
Interagency Convoy	IR 4		167.3250	173.0375
Incident Calling (Direct)	IR 5	Direct for NC 1	169.5375 (S)	169.5375
Incident Command 1 (Direct)	IR 6	R <sub>2</sub>	170.0125 (S)	170.0125
Medical Evacuation Control (Direct)	IR 7	Direct for IR 3	Direct for IR 3   170.4125 (S)	170.4125
Logistics Control (Direct)	IR 8	Direct for IR 4	170.6875 (S)	170.6875
Interagency Convoy (Direct)	IR 9	Direct for IR 5	Direct for IR 5   173.0375 (S)   173.0375	173.0375
*See "Conditions for Use of Federal Interoperability Channels" on page 17,18, and 19	ral Interoperabilit	y Channels" on pag	ge 17,18, and 19.	

enable/disable CTCSS without reprogramming the radio, the indicated CTCSS tone should also be programmed for receive, and the user instructed how and when to enable/disable. Default operation should be carrier squelch receive, CTCSS 167.9/CSQ transmit. If the user can

UHF Incident Response (IR) Federal Interoperability Channel Plan	e (IR) Federa	ıl Interoperabil	lity Channel F	olan
Assignment	NTIA ID	Note	Mobile	Mobile
(subject to availability & local plans)			TX(MHz)	RX(MHz)
Incident Calling	NC 2 Calling	NC 2CALL	419.2375	410.2375
Ad hoc assignment	IR 10		419.4375	410.4375
Ad hoc assignment	R 11		419.6375	410.6375
SAR Incident Command	IR 12		419.8375	410.8375
Ad hoc assignment	IR 13		413.1875 (S)	413.1875
Interagency Convoy	IR 14		413.2125 (S) 413.2125	413.2125
Incident Calling (Direct)	IR 15	Direct for NC 2 410.2375 (S) 410.2375	410.2375 (S)	410.2375
		Calling		
Ad hoc assignment	IR 16	Direct for IR 10 410.4375 (S) 410.4375	410.4375 (S)	410.4375
Ad hoc assignment	IR 17	Direct for IR 11 410.6375 (S) 410.6375	410.6375 (S)	410.6375
SAR Incident Command (Direct)	IR 18	Direct for IR 12 410.8375 (S) 410.8375	410.8375 (S)	410.8375
*See "Conditions for Use of Federal Interoperability Channels" on page 17,18, and 19.	nteroperability C	hannels" on page	17,18, and 19.	

enable/disable CTCSS without reprogramming the radio, the indicated CTCSS tone should also be

Default operation should be carrier squelch receive, CTCSS 167.9/CSQ transmit. If the user can

programmed for receive, and the user instructed how and when to enable/disable

VHF L	w Enfor	VHF Law Enforcement (LE) Federal Interoperability Channel Plan	leral Interoper	ability Chann	el Plan
Description	DI	Note	Mobile TX(MHz)	Mobile RX(MHz)	CTCSS/NAC
Calling	LEA	Analog	167.0875 (S)	167.0875	167.9 Tx, CSQ Rx
Tactical	LE 1	Analog	162.0875	167.0875	167.9 Tx, CSQ Rx
Tactical	LE 2		162.2625	167.2500	\$68F
Tactical	LE 3		162.8375	167.7500	\$68F
Tactical	LE 4		163.2875	168.1125	\$68F
Tactical	LE 5		163.4250	168.4625	\$68F
Tactical	LE 6	Direct for LE 2	167.2500 (S)	167.2500	\$68F
Tactical	LE 7	Direct for LE 3	167.7500 (S)	167.7500	\$68F
Tactical	LE 8	Direct for LE 4	168.1125 (S)	168.1125	\$68F
Tactical	LE 9	Direct for LE 5	168.4625 (S)	168.4625	\$68F
*See "Condition CTCSS on rece	s for Use of ive only if u	*See "Conditions for Use of Federal Interoperability Channels" on page 17, 18, and 19. CTCSS on receive only if user selectable; else CSQ	ility Channels" on I	oage 17, 18, and	19.

UHF L	_aw Enfo	UHF Law Enforcement (LE) Federal Interoperability Channel Plan	ederal Interop	erability Ch	annel Plan
Description NTIA ID	NTIA ID	Note	Mobile TX(MHz)	Mobile RX(MHz)	CTCSS/NAC
Calling	LE B	Analog	414.0375 (S)	414.0375	167.9 Tx, CSQ Rx
Tactical	LE 10	Analog	418.9875	409.9875	167.9 Tx, CSQ Rx
Tactical	LE 11		419.1875	410.1875	\$68F
Tactical	LE 12		419.6125	410.6125	\$68F
Tactical	LE 13		414.0625 (S)	414.0625	\$68F
Tactical	LE 14		414.3125 (S)	414.3125	\$68F
Tactical	LE 15		414.3375 (S)	414.3375	\$68F
Tactical	LE 16	Direct for LE 10 - Analog	409.9875 (S)	409.9875	167.9 Tx, CSQ Rx
Tactical	LE 17	Direct for LE 11	410.1875 (S)	410.1875	\$68F
Tactical	LE 18	Direct for LE 12 410.6125 (S)	410.6125 (S)	410.6125	\$68F
*See "Condition CTCSS on rece	ns for Use o	*See "Conditions for Use of Federal Interoperability Channels" on page 17, 18, and 19. CTCSS on receive only if user selectable; else CSQ	ability Channels" o	on page 17, 18,	and 19.

419.8375 410.8375 410.8375 410.8375 410.8375 410.8375 410.8375 410.8375 410.8375 410.8375 410.8375 410.8375 410.8375 410.8375 410.8375 410.8375 450.8625 453.8625	<u>_</u>	Mobile TX(MHz)	Mobile RX (MHz)	CTCSS
419.8375 410.8375 159.4725 159.4725 159.4725 458.8625 453.8625 453.8625 823.0125 (808.0125 (868.0125 (853.0125 (853.0125 (853.0125 (858.				
159.4725 159.4725  458.8625 453.8625  458.8625 453.8625  823.0125 (808.0125 868.0125 (853.0125 after rebanding) after rebanding)  156.8500 (this use requires FCC STA) requires FCC STA)	IR 12**	419.8375	410.8375	167.9 Tx, CSQ Rx
458.8625 453.8625  823.0125 (808.0125 868.0125 (853.0125 after rebanding) after rebanding)  156.8500 (this use requires FCC STA) requires FCC STA)	VTAC14	159.4725	159.4725	156.7 Tx, CSQ Rx
458.8625 453.8625  823.0125 (808.0125 868.0125 (853.0125 after rebanding) after rebanding)  156.8500 (this use requires FCC STA) requires FCC STA)				(156.7 Rx if user
458.8625 453.8625  823.0125 (808.0125 868.0125 (853.0125 after rebanding) after rebanding) 156.8500 (this use requires FCC STA) requires FCC STA)				selectable)
823.0125 (808.0125 868.0125 (853.0125 after rebanding) after rebanding)  156.8500 (this use requires FCC STA) requires FCC STA)	UTAC43	458.8625	453.8625	156.7 Tx, CSQ Rx
823.0125 (808.0125 868.0125 (853.0125 after rebanding) after rebanding)  156.8500 (this use requires FCC STA) requires FCC STA)				(156.7 Rx if user
823.0125 (808.0125 868.0125 (853.0125 after rebanding) after rebanding)  156.8500 (this use requires FCC STA) requires FCC STA)				selectable)
after rebanding) after rebanding)  156.8500 (this use requires FCC STA)  after rebanding)  requires FCC STA)	8TAC94	823.0125 (808.0125	868.0125 (853.0125	156.7 Tx, CSQ Rx
156.8500 (this use requires FCC STA)		after rebanding)	after rebanding)	(156.7 Rx if sel.)
requires FCC STA)	VHF Marine	156.8500 (this use	156.8500 (this use	
	Ch. 17***	requires FCC STA)	requires FCC STA)	

VTAC14D for VTAC14, VTAC43D for VTAC43, 8TAC94D for 8TAC94. \* If a repeater is not available, substitute the corresponding talk around channel: IR18 for IR12,

<sup>\*\*</sup>See conditions for use of Federal Interoperability Channels on pages 17, 18, and 19.

<sup>\*\*\*</sup>VHF marine ch. 17 is wideband FM, emission 16K0F3E.

Federal / Non-Federal V	Federal / Non-Federal VHF SAR Operations Interoperability Plan
SAR Function	Frequency (MHz)
Ground Operations	155.1600 (wideband FM)
Maritime Operations *	157.0500 or 157.1500 (VHF Marine ch.21A or 23A) as specified
	by USCG Sector Commander
Air Operations - civilian	123.1000 MHz AM (may not be used for tests or exercises)
Air Operations – USCG/Military	345.0 MHz AM for initial contact only, then move to 282.8 MHz
	AM or other working channel.
Air rescue assets to air rescue assets	As charted on standard air chart or MULTICOM 122.850 (south or
(deconfliction)	west sector) & 122.900 MHz (north or east sector), or as specified
	by FAA. 122.850 may not be used for tests or exercises
Ground to Air SAR working channel	157.1750 (VHF Marine channel 82A)
Ground to Maritime SAR working channel	157.0500 21A (23A, 81A, 83A alternates as specified by local
	USCG Sector Commander) **
Maritime/Air/Ground SAR working channel *	157.1750 83A (21A, 23A, 81A alternates as specified by local
	USCG Sector Commander) **
EMS / Medical Support	155.3400 (wideband FM)
Hailing* & DISTRESS	156.8000 VHF Marine channel 16
only-Maritime/Air/Ground	

<sup>\*</sup> Use VHF Marine ch.16 to make contact (30 seconds max.), then move to appropriate working channel as directed Authority or appropriate license. VHF marine channels use wideband FM. Emission 16K0F3E by local USCG Sector Commander. Non-maritime use of any VHF Marine channel requires FCC Special Temporary

Direction from USCG, FCC, or FAA overrides information in this table. This table does not convey authority to operate.

<sup>\*\*</sup> VHF Marine channels: 21A=157.0500 23A=157.1500 81A=157.0750 83A=157.1750 MHz

IHV	VHF Public Safety Mutual Aid and Common Channels	Mutual Aid a	and Common	Channels
Channel (MHz)	Usage	Wideband ID	Wideband ID Narrowband ID	Note
155.1600	Search and	SAR WFM	SAR NFM	Not designated by FCC;
	Rescue Common			availability varies.
154.2650 mobile	Fire Mutual Aid	VFIRE22W	VFIRE22	
154.2725	Fire Mutual Aid		VFIRE24	
154.2800	Fire Mutual Aid	VFIRE21W	VFIRE21	
base/mobile				Not available iii Fuelto Rico
154.2875			VFIRE25	alla tile viigii isialias
154.2950 mobile	Fire Mutual Aid	VFIRE23W	VFIRE23	
154.3025			VFIRE26	
155.3400	EMS Mutual Aid	VMED28W	VMED28	May be designated for EMS
base/mobile				Mutual Aid.
155.3475			VMED29	May be designated for EMS Mutual Aid.
155.4750	Law Enforcement	VLAW31W	VLAW31	
base/mobile	Mutual Aid			
155.4825	Law Enforcement		VLAW32	
	Mutual Aid			

See also "Non-Federal VHF National Interoperability Channels" and "Non-Federal VHF Inland Interoperability Channels" on page 21 and 22 of this document. Rules for use of these channels are contained in 47 CFR 90.20 and NTIA Manual Section 4.3.11 & 7.3.4.

		UHF MED Channels	nels	
Wideband			Narrowband	nd .
Mobile Rx/Tx (MHz)	ID	Use	Mobile Rx/Tx (MHz)	ID
462.950/467.950	MED-9	EMS Common Dispatch	462.9625/467.9625	MED-92
462.975/467.975	MED-10	EMS Common Dispatch	462.9875/467.9875	MED-102
463.000/468.000	MED-1	EMS Common	463.0125/468.0125	MED-12
463.025/468.025	MED-2	EMS Common	463.0375/468.0375	MED-22
463.050/468.050	MED-3	EMS Common	463.0625/468.0625	MED-32
463.075/468.075	MED-4	EMS Common	463.0875/468.0875	MED-42
463.100/468.100	MED-5	EMS Common	463.1125/468.1125	MED-52
463.125/468.125	MED-6	EMS Common	463.1375/468.1375	MED-62
463.150/468.150	MED-7	EMS Common	463.1625/468.1625	MED-72
463.175/468.175	MED-8	EMS Common	463.1875/468.1875	MED-82

# NOAA Weather Radio "All Hazards" Broadcasts

is recommended number them in frequency order. For programming in land-mobile radios, frequency order manufacturers number the US weather channels in the order they came into use, others in some areas. These channels should be programmed as RECEIVE ONLY. Some radio the US & Canada; channels WX8-WX9 are used for Canada Marine Weather broadcasts non-weather related hazard information 24 hours a day. Channels WX1-WX7 are used in NWR broadcasts National Weather Service (NWS) warnings, watches, forecasts and other

	Wea (WX1-WX7	US & Canac	Broadcast ta; WX8-WX9	Weather Radio Broadcasts – Receive Only WX1-WX7 US & Canada; WX8-WX9 Canada Marine Weathe	e Only rine Weather	)
WX1	WX2	WX3	WX4	WX5	WX6	WX7
162.400	162.425	162.450	162.475	162.500	162.525	162.550

161.775	161.850
WX9	WX8
Marine 83B	Marine 21B

# **COMMON COMMUNICATIONS REFERENCES**

# **Operations Center Telephone Numbers**

SK SK	Main Number	202-282-8000 202-282-8101
FCC	Federal Communications Commission Communications and Crisis Management Center (CCMC) e-mail comm-ctr@fcc.gov	202-418-1122,  -2813 FAX
EMA:	FEMA Federal Emergency Management Agency,  National Response Coordination Center (NRCC)  (general number for all ESFs – see next page)	202-646-2828 FEMA-NRCC@dhs.gov
NCS	National Communications System  NCC Radio Room/SHARES HF Radio	703-235-5080
	Operations Center / NCC Watch	703-235-5080 703-379-0021
ARC	American National Red Cross 24-hr Disaster Operations Center	800-526-3571, 202-303-5555
RRL	ARRL American Radio Relay League  Main Number	<u>emergency@arrl.org</u> 860-594-0200 -0259 fax

### **Emergency Support Functions (ESF)**

ESF #1: Transportation	ESF #9: Urban Search & Rescue
ESF #2: Communications	ESF #10: Oil & Hazardous Materials Response
ESF #3: Public Works and Engineering	ESF #11: Agriculture and Natural Resources
ESF #4: Firefighting	ESF #12: Energy
ESF #5: Emergency Management	ESF #13: Public Safety and Security
ESF #6: Mass Care, Housing, and Human Services	ESF #14: Long-Term Community Recovery
ESF #7: Resource Support	ESF #15: External Affairs
ESF #8: Public Health and Medical Services	

### **CTCSS Tones**

User	Freq.	Motorola	User	Freq.	Motorola
Code*	<u>(Hz)</u>	<u>Code</u>	Code*	<u>(Hz)</u>	<u>Code</u>
01	67.0	XZ	21/04	136.5	4Z
	69.3**	WZ	22/13	141.3	4A
02	71.9	XA	23/05	146.2	4B
03	74.4	WA	24/14	151.4	5Z
04	77.0	XB	25/06	156.7	5A
05	79.7	WB	26	162.2	5B
06	82.5	YZ	27/07	167.9	6Z
07	85.4	YA	28	173.8	6A
80	88.5	YB	29	179.9	6B
09	91.5	ZZ	30	186.2	7Z
10	94.8	ZA	31	192.8	7A
11	97.4	ZB	32	203.5	M1
12/09	100.0	1Z		206.5	8Z
13/08	103.5	1A	33	210.7	M2
14/10	107.2	1B	34	218.1	M3
15/01	110.9	2Z	35	225.7	M4
16/11	114.8	2A		229.1	9Z
17	118.8	2B	36	233.6	M5
18/02	123.0	3Z	37	241.8	M6
19/12	127.3	3A	38	250.3	M7
20/03	131.8	3B		254.1	0Z

<sup>\*</sup>User Code = ICOM# / USFS-CDF

<sup>\*\* 69.4</sup> in some radios

### **DCS Codes**

Normal	Inverted	Nor.	Inv.	Nor.	Inv.	Nor.	Inv.
023	047	155	731	325	526	516	432
025	244	156	265	331	465	523	246
026	464	162	503	332	455	526	325
031	627	165	251	343	532	532	343
036	172	172	036	346	612	546	132
043	445	174	074	351	243	565	703
047	023	205	263	364	131	606	631
051	032	212	356	365	125	612	346
053	452	223	134	371	734	624	632
054	413	225	122	411	226	627	031
065	271	226	411	412	143	631	606
071	306	243	351	413	054	632	624
072	245	244	025	423	315	654	743
073	506	245	072	431	723	662	466
074	174	246	523	432	516	664	311
114	712	251	165	445	043	703	565
115	152	252	462	446	255	712	114
116	754	255	446	452	053	723	431
122	225	261	732	454	266	731	155
125	365	263	205	455	332	732	261
131	364	265	156	462	252	734	371
132	546	266	454	464	026	743	654
134	223	271	065	465	331	754	116
143	412	274	145	466	662		
145	274	306	071	503	162		
152	115	311	664	506	073		
032	051	315	423				

### **P25 Digital Codes**

### NAC - Network Access Codes

\$293 default NAC

\$F7E receiver will unsquelch with any incoming NAC\$F7F a repeater with this NAC will allow incoming signals

to be repeated with the NAC intact

### TGID - Talkgroup ID

\$0001 default

\$0000 no-one, talkgroup with no users – used for

individual call

**\$FFFF** talkgroup which includes everyone

### **Unit ID**

\$000000 no-one - never associated with a radio unit

**\$000001-\$98767F** for general use

\$989680-\$FFFFFE for talkgroup use or other special


purposes

**\$FFFFF** designates everyone – used when implementing a

group call with a TGID3

### RS-232 Connectors (DB25 and DB9)

"Front" refers to the ends with the pins; "rear" refers to the end with the cable. The following is a view of the pins, looking at the front of the female connector (rear of male):

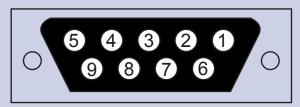

same for DB25, except top row is pins 1 - 13, bottom 14 - 25

DB9	<u>DB25</u>	<u>Signal</u>
1	8	Carrier Detect
2	3	Receive data
3	2	Transmit Data*
4	20	Data Terminal Ready*
5	1,7	Ground **
6	6	Data Set Ready
7	4	Request to Send*
8	5	Clear to Send
9	22	Ring Indicator

<sup>\*</sup> An output from the computer to the outside world.

<sup>\*\*</sup> On the DB25, 1 is the protective ground, 7 is the signal ground.

### **Telephone Connectors**

Pin numbers are from left to right, holding the plug with the contacts up and looking at the side that does not have the spring clip.

<u>Pin</u>	<u>RJ25</u>	<u>RJ14</u>	<u>RJ11</u>
1	T3		
2	T2	T2	
3	R1	R1	R1
4	T1	T1	T1
5	R2	R2	
6	R3		


<u>Color</u>	<u>Banded</u>	<u>Solid</u>
T1	White/Blue	Green
R1	Blue/White	Red
T2	White/Orange	Black
R2	Orange/White	Yellow
T3	White/Green	White
R3	Green/White	Blue
T4	White/Brown	Orange
R4	Brown/White	Brown

### **RJ-45 Wiring**

### **Color Codes for T568B**

<u>Pin</u>	<u>Color</u>	<u>Pair</u>	<u>Name</u>
1	white/orange	2	TxData +
2	orange	2	TxData -
3	white/green	3	RecvData+
4	blue	1	
5	white/blue	1	
6	green	3	RecvData-
7	white/brown	4	
8	brown	4	

Note that the odd pin numbers are always the white with stripe color.



### **Telephone Block Wiring**

Tip,	Tip Color	50 Pin	66 or 110
Ring	(rev. Ring)	Position	Block Posn.
1	White/Blue	26,1	1,2
2	White/Orange	27,2	3,4
3	White/Green	28,3	5,6
4	White/Brown	29,4	7,8
5	White/Slate	30,5	9,10
5 6 7 8 9	Red/Blue Red/Orange Red/Green Red/Brown	31,6 32,7 33,8 34,9	11,12 13,14 15,16 17,18
10	Red/Slate Black/Blue Black/Orng Black/Green Black/Brown	35,10	19,20
11		36,11	21,22
12		37,12	23,24
13		38,13	25,26
14		39,14	27,28
15	Paragraph State Yellow/Blue Yellow/Orange Yellow/Green Yellow/Brown Yellow/Slate	40,15	29,30
16		41,16	31,32
17		42,17	33,34
18		43,18	35,36
19		44,19	37,38
20		45,20	39,40
21	Violet/Blue Violet/Orange Violet/Green Violet/Brown Violet/Slate	46,21	41,42
22		47,22	43,44
23		48,23	45,46
24		49,24	47,48
25		50,25	49,50

### **Telephone Keypad Letters**

1:(QZ) 2:ABC 3:DEF 4:GHI 5:JKL 6:MNO 7:P(Q)RS 8:TUV 9:WXY(Z) \* 0 #

### **Wireless Priority Service (WPS)**

Dial \*272 + destination number [send]

### **DSN Area Codes**

312 - CONUS 313 – Caribbean

314 - Europe 315 - Pacific

317 - Alaska 318 - Southwest Asia

319 - Canada

### **Satellite Phone Dialing Instructions**

# From a US Landline: Helpful when giving someone directions to call you back!

To an Iridium phone directly as an International Call

011 + 8816xxxxxxx (Iridium Phone Number)

To an M4 phone directly as an International Call

011 + 87x + 76xxxxxxx (Mobile Number)\*

Iridium PIN (default) is: 1111 (enter when powering-on the Iridium Subscriber Unit)

### From an M4: [Note - Can not call Toll-Free numbers]

To a US Phone number:

00 + 1 + (10-digit US phone number)

To an Iridium phone directly

00 + 8816xxxxxxx (Iridium Phone Number)

To an M4 phone directly

00 + 87x + 76xxxxxxx (Mobile Number)\*

### From an Iridium (provisioned commercially):

To a US Phone number:

00 + 1 + xxx.xxx.xxxx (US phone number)

To an Iridium phone directly

00 + 8816xxxxxxx (Iridium Phone Number)

To an M4 phone directly

00 + 87x + 76xxxxxxx (Mobile Number)\*

### From an Iridium (provisioned by DOD):

ISU (Iridium Subscriber Unit) to DSN

00 + 696 + (DSN Area Code) + (DSN 7-digit number)

ISU to U.S. Domestic

00 + 697 + (U.S. Area Code) + (7-digit US number)

ISU to International Long Distance (ILD)

00 + 698 + (Country Code) + ("National Destination Code" or "City Code") - (Subscriber Number)

ISU to INMARSAT

00 + 698 + (INMARSAT ocean region code) + (INMARSAT subscriber number)

ISU to Local Hawaii

00 + 699 + (7-digit local commercial number)

1-800 toll-free 00 + 699 + 1+ 800 + (7-digits)

ISU to ISU, handset-to-handset

00 + (12-digit ISU subscriber number, e.g., 8816 763-xxxxx)

### **Ocean Region Codes**

871	Atlantic Ocean	Region - East	[AOR-East]

872 Pacific Ocean Region [POR]

873 Indian Ocean Region [IOR]

874 Atlantic Ocean Region – West [AOR-West]

870 Global Access [Doesn't work for all vendors]

\* Your call will go through faster if you use the appropriate code 871-874 instead of 870, which tries all four. If you don't know in which ocean region your party is located, use 870.

INMARSAT-A Service Codes						
Voice/Fax				Telex		
00	Automatic Calls		00	Automatic Calls		
11	Operator Assistance*		11	Operator Assistance*		
12	Operator Info*		12	Operator Info*		
31	Customer Service*		21	Store and Forward		
33	Technical Assistance*		31	Customer Service*		
34	Person-to-Person Calls		33	Technical Assistance*		
35	Collect Calls		36	Credit Card		
36	Credit Card Calls		38	Medical Assistance*		
37	Call Duration		39	Maritime Assistance*		
38	Medical Assistance*		41	Meteorological Reports*		
39	Maritime Assistance*		42	Navigational Hazard		
91	Test*		43	AMVER		
92	Commissioning Tests*		91	Automatic Telex Test*		
* No Charge			92	Commissioning Tests*		

INMARSAT-A service terminated on 31 December 2007

	INMARSAT-M Service Codes
00	Automatic calls
11	International Operator
12	International Information
13	National Operator
14	National Information
17	Telephone Call Booking
20	Access to a Maritime PAD
23	Abbreviated dialing
24	Post fax
31	Maritime Enquiries
32	Medical Advice
33	Technical Assistance
34	Person-to-Person call
35	Collect call
36	Credit Card call
37	Time and Duration
38	Medical Assistance
39	Maritime Assistance
41	Meteorological Reports
42	Navigational Hazards and Warnings
43	Ship Position reports
57	Retrieval of mailbox messages
6x	Administration, specialized use
70	Databases
91	Automatic Line Test
92	Commissioning tests

### **GETS - Govt. Emergency Telecomm. Service**

User Assistance: 1-800-818-GETS, 1 703 818 GETS

http://www.ncs.gov

GETS test #: 1-703-818-3924

GETS call from a commercial phone:

1-710-NCS-GETS (1-710-627-4387)

1-888-288-GETS (ATT)

1-800-900-GETS (MCI/Verizon)

1-800-257-8373 (Sprint)

Optional: specify long-distance carrier

1010+288 (ATT) 1-710-NCS-GETS

1010+222 (MCI/Verizon)

1010+333 (Sprint) "

Listen for tone: enter PIN

At prompt, enter 10-digit dest. number

GETS call from a rotary or pay phone:

Get outside line, listen for dial tone

Optional: specify long-distance carrier

1010+288 for ATT

1010+222 for MCI/Verizon

1010+333 for Sprint

Dial 1-710-NCS-GETS (627-4387)

Wait for GETS operator

Give your PIN and 10-digit dest. number.

### COMMONLY USED FREQUENCIES

### **Aviation Frequencies**

121.5 Emergency & Distress

122.9 SAR Secondary and Training

123.1 SAR

122.925 – for use only for communications with or between aircraft when coordinating natural resources programs of Federal or State natural resources agencies, including forestry management and fire suppression, fish and game management and protection and environmental monitoring and protection.

Typical Uses	Fixed Wing	Rotary Wing
Air-to-Air	122.750 F	122.925 M
	122.850 M	122.975 U
	122.925 M	122.850 M
	122.975 U	123.025 A
	123.075 U	123.075 U
Air-to-Ground		122.850 M
	122.850 M	122.925 M
	122.925 M	122.975 U
	122.975 U	123.025 A
	123.075 U	123.075 U

A – Helicopter air-to-air, air traffic control operations.

F - Fixed-wing air-to-air.

M – Multicom.

U - Unicom.

Ask FAA/FCC for emergency use of 123.3 or 123.5 (flight training).

### **Marine Frequencies**

References: 47CFR80, FCC PR-5000

156.025 to 157.425 in 25 kHz steps; see next 2 pages for channel/freqs.

Duplex channels ship transmit -4.600 MHz

Channel frequency use (check for local variations)

06 156.300 Intership Safety, SAR, USCG

09 156.450 Secondary Calling & Safety

16 156.800 Distress, Calling, & Safety

\* 21A/23A 157.050/157.150 USCG

22A 157.100 Liaison (USCG-Public)

9, 68, 69, 71, 72, 78A Non-commercial (chat)

7A,8,9,10,11,18A,19A,67,79A,80A,88A Commercial

24-28, 84-87, (88) Marine Telephone

12,14,20,65,66,73,74,77 Port Operations

13, 67 Navigational (bridge to bridge)

17 Maritime Control (state & local govt.)

70 Digital Selective Calling (DSC)

\* 81A/82A/83A 157.075/.125/.175 USCG/US Govt./USCG

88A 157.425 Commercial, Aircraft

Shipboard repeaters: 457.525/550/575/600

Inputs are +10.225 MHz (foreign vessels may use +10.0 MHz offset – not permitted in US waters).

Maritime freqs. assignable to aircraft:

2738 2830 3023 4125 5680 kHz; channels 6 8 9 16 18A 22A 67 68

72 & 88A; see 47CFR80.379 for restrictions

<sup>\*</sup> Ch. 21A/22A/23A/81A/83A subject to coordination with USCG Sector Commander

\* "A" = simplex operation on ship channel. All channels for intership & coast/ ship communications unless otherwise indicated. "@"=in some areas of AK.

<u>Ch.*</u>	Ship xmit	Coast xmit	Use/restrictions
60	156.025	160.625	not available in US
01A	156.050	160.650	VTS only
61	156.075	160.675	not available in US
02	156.100	160.700	not available in US
62	156.125	160.725	not available in US
03	156.150	160.750	not available in US
63A	156.175	160.775	VTS only
04	156.200	160.800	not available in US
64	156.225	160.825	not available in US
05A	156.250	160.850	VTS only
65A	156.275	160.875	port
06	156.300		Safety; SAR
66A	156.325	160.925	port
07A	156.350	160.950	A: commercial
67	156.375	156.375	nav; commercial; non-commercial@
08	156.400		commercial
68	156.425	156.425	non-commercial calling
09	156.450	156.450	commercial; non-commercial calling
69	156.475	156.475	non-commercial
10	156.500	156.500	commercial
70	156.525	156.525	Digital Selective Calling only
11	156.550	156.550	commercial
71	156.575	156.575	non-commercial
12	156.600	156.600	port
72	156.625		commercial@, non-commercial
13	156.650	156.650	navigational

73	156.675	156.675	port
14	156.700	156.700	port
74	156.725	156.725	port
15	156.750	156.750	coast: weather & conditions
75			guard band
16	156.800	156.800	DISTRESS; calling
76			guard band
17	156.850	156.850	State Control; SAR training
77	156.875		port
18A	156.900	161.500	A: commercial
78A	156.925	161.525	A: non-commercial
19A	156.950	161.550	A: commercial
79A	156.975	161.575	A: coml non-coml Great Lakes
20A	157.000	161.600	A: port; ship/coast
80A	157.025	161.625	A: coml non-coml Great Lakes
* 21	157.050	161.650	A: USCG
* 81	157.075	161.675	A: USCG
22A	157.100	161.700	A: USCG; SAR training
82	157.125	161.725	A: US Govt. only
* 23	157.150	161.750	A: USCG
* 83	157.175	161.775	A: USCG
24	157.200	161.800	Marine Operator
84	157.225	161.825	Marine Operator
25	157.250	161.850	Marine Operator
85	157.275	161.875	Marine Operator
26	157.300	161.900	Marine Operator
86	157.325	161.925	Marine Operator
27	157.350	161.950	Marine Operator
87	157.375	161.975	Marine Operator
28	157.400	162.000	Marine Operator
88/A	157.425	162.025	Marine Operator A: commercial

<sup>\*</sup> Subject to coordination with USCG Sector Commander

### Multi-Use Radio Service (MURS)

151.820 MHz

151.880 MHz

151.940 MHz

154.570 MHz (shared with business band)

154.600 MHz (shared with business band)

Maximum power output 2 watts.

Narrowband on 151 MHz frequencies, narrowband or wideband on the 154 MHz frequencies.

External gain antennas may be used (must be no more than 60 feet above ground or 20 feet above the structure on which it is mounted).

Voice or data (but not store-and-forward packet operation).

Personal or business use.

No license required.

## GMRS Frequencies Repeater outputs (inputs are +5 MHz):

462.550 462.575 462.600 462.625 462.650

462.675\* 462.700 462.725

\* nationwide traveler's assistance; if CTCSS is required, try 141.3 Hz.

Simplex prohibited on repeater inputs.

Interstitial frequencies (simplex, not more than 5 watts): 462.5625 .5875 .6125 .6375 .6625 .6875 .7125 (shared with FRS)

## FRS Frequencies (Channels 1-14)

462.5625/5875/6125/6375/6625/6875/7125 (shared with GMRS) 467.5625/5875/6125/6375/6625/6875/7125

### **CB** Frequencies

1-5 26.965 26.975 26.985 27.005 27.015

6-10 27.025 27.035 27.055 27.065 27.075

11-15 27.085 27.105 27.115 27.125 27.135

16-20 27.155 27.165 27.175 27.185 27.205

21-25 27.215 27.225 27.255 27.235 27.245

26-30 27.265 27.275 27.285 27.295 27.305

31-35 27.315 27.325 27.335 27.345 27.355

36-40 27.365 27.375 27.385 27.395 27.405

Remote Control: 26.995 27.045 27.095 27.145 27.195

### **Common Business Frequencies**

# IS=Special Industrial IB=Business ZA=GMRS GMRS (ZA) freqs. are not for IS/IB use.

27.49	IB	Itinerant
35.04	ΙB	Itinerant
43.0400	IS	Itinerant
151.5050	IS	Itinerant
151.6250	ΙB	RED DOT Itinerant
151.9550	ΙB	PURPLE DOT
152.8700	IS	Itinerant
154.5700	ΙB	BLUE DOT (also MURS)
154.6000	IB	GREEN DOT (also MURS)
158.4000	IS	Itinerant
451.8000	IS	Itinerant
456.8000	IS	Itinerant
462.550 - 462.725	ZA	(see previous page)
467.550 - 467.725	ZA	(see previous page)
462.5750	ZA	WHITE DOT
462.6250	ZA	BLACK DOT
462.6750	ZA	ORANGE DOT
462.7125	ZA	Radio Shack HTs (GMRS)
464.5000	ΙB	BROWN DOT Itinerant 35w.
464.5500	IB	YELLOW DOT Itinerant 35w.
467.7625	ΙB	J DOT
467.8125	ΙB	K DOT

467.8500	IB	SILVER STAR
467.8750	IB	GOLD STAR
467.9000	IB	RED STAR
467.9250	IB	BLUE STAR
469.5000	IB	Simplex or input to 464.500 if
		repeater. Itinerant 35 w. max
469.5500	IB	Simplex or input to 464.550 if
		repeater. Itinerant 35 w. max

GMRS (ZA) freqs. are often mistaken for business freqs., due to their color-dot designations.

### **Railroad Frequencies**

161.205 Railroad Police Mutual Aid

160.215(ch.7)-161.565(ch.97), every 15 kHz. Ch. 2-6 are used in Canada only: 159.810 159.930 160.050 160.185 160.200

452.325 / 457.325

452.375 / 457.375

452.425 / 457.425

452.475 / 457.425

452.875 / 457.875

Shared Motor Carrier & Railroad:

452.900 / 457.900

452.925 / 457.925

452.950 / 457.950

### SAR (Search And Rescue) Frequencies

### Land SAR

Typical freqs. are: 155.160, .175, .205, .220, .235, .265, .280, or .295 If CTCSS is required try 127.3 Hz (3A).

### Water SAR

156.300 (VHF Marine ch. 06) Safety and SAR

156.450 (VHF Marine ch. 09) Non-commercial supplementary calling

156.800 (VHF Marine ch. 16) DISTRESS and calling

156.850 (VHF Marine ch. 17) State control

157.100 (VHF Marine ch. 22A) Coast Guard Liaison

### **USCG Auxiliary**

138.475, 142.825, 143.475, 149.200, 150.700

### Air SAR

3023, 5680, 8364 kHz(lifeboat/survival craft),

4125 kHz(distress/safety with ships and coast stations)

121.5 MHz emergency and distress

122.9 MHz SAR secondary & training

123.1 MHz SAR primary

### **USCG/DOD Joint SAR**

345.0 MHz AM initial contact, 282.8 MHz AM working

### Military SAR


40.50 wideband FM US Army/USN SAR


138.450 AM 138.750 AM


**USAF SAR** 


### **VHF Marine Channels**

6, 9, 15, 16, 21A, 23A, 81A, 83A

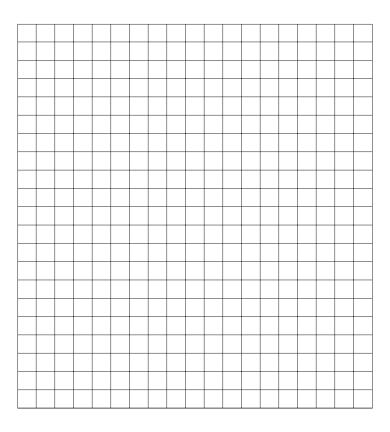

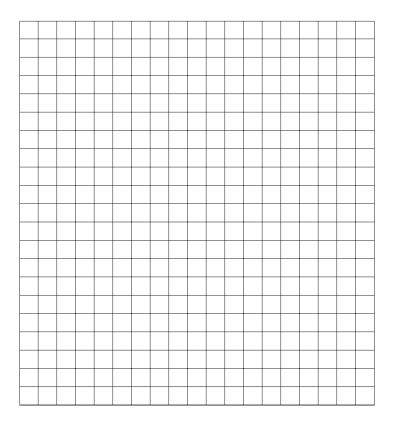

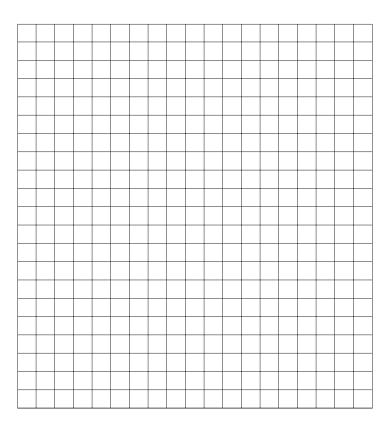

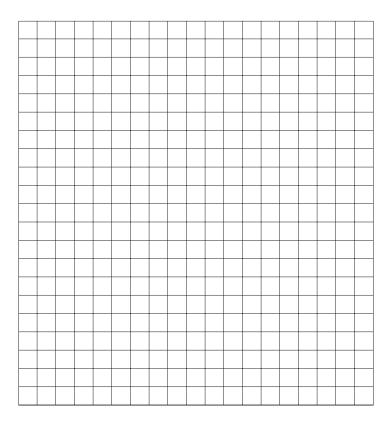







		Ī.
-		
7		
-	_	r
	_	
	7	
	_	
_	_	
,		
$\sim$	_	
100		
	_	
	_	
		ı
	-	
2	-	
	_	
		[
		Ι.
		[
<u> </u>		
		Ι.
		Γ
		ſ
		ſ
		ſ
		ſ
		ſ
	_	