





	TABLE OF CONTENTS		
	USING THE NATIONAL INTEROPERABILITY FIELD OPERATIONS of Recommendations for Programming the Federal Interoperability Cha Regulations and Guidelines for National Interoperability Conditions for Use of Federal Interoperability Channels Law Enforcement Plans Incident Response Plans FCC Rules and Regulations	nnels 19 	
÷	INTEROPERABILITY CHANNELS	25 26 27 28 29 30 30 33 33 34 34 35 36 37 38 39 40 41 41	٠
	COMMON COMMUNICATIONS REFERENCES		
	•		


	•	
-		_
	Emergency Support Functions (ESF)	51
	FEMA Regions - States and Territories	
	U.S. Coast Guard Rescue Coordination Centers	
	CTCSS Tones and Codes	
	DCS Codes	
	P25 Digital Codes	
	RS-232 Connectors (DB25 and DB9)	
	RJ-45 Wiring	
	Telephone Connectors	
	Telephone Block Wiring	
	Telephone Keypad Letters	
	DSN Area Codes	61
	Cellular Telephone Emergency Response	61
	Satellite Phone Dialing Instructions	
	INMARSAT-M Service Codes	
\bigcirc	Wireless Priority Service (WPS)	65 💮
Ŷ	GETS - Govt. Emergency Telecomm. Service	
	Text Messaging	
	Line-of-Sight Formulas	
	COMMONLY USED FREQUENCIES	
	Aviation Frequencies	
	VHF Marine Channel Listing	
	VHF Marine Channels & Frequencies	
	Multi-Use Radio Service (MURS)	
	GMRS Frequencies	
	FRS Frequencies	
	CB Frequencies	
	Common Business Frequencies	
	Railroad Frequencies	
	SAR (Search And Rescue) Frequencies	
	NOTES	
	(

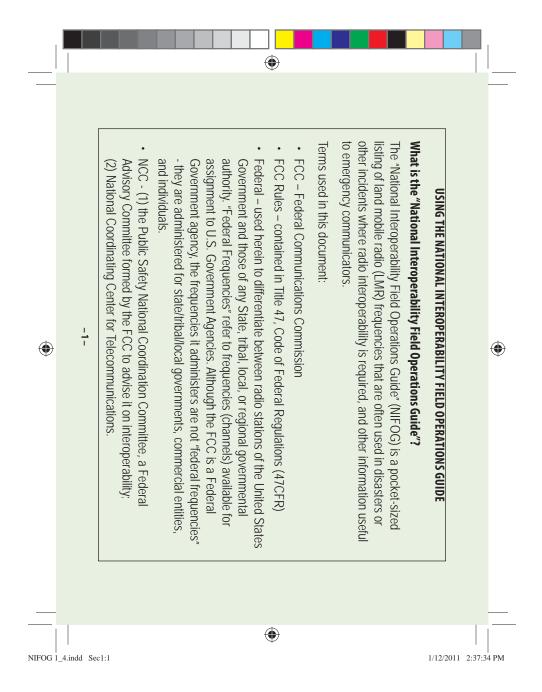


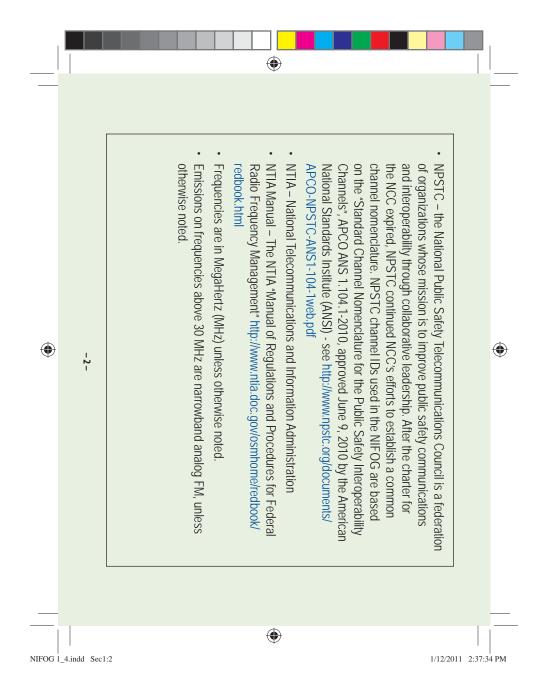


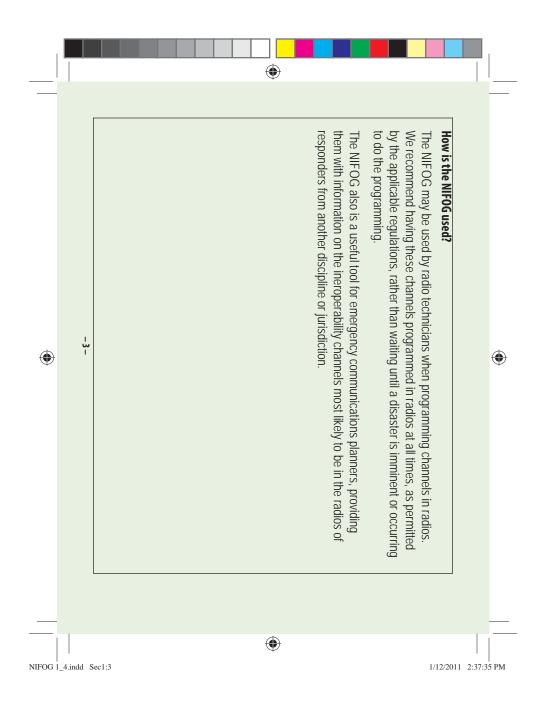


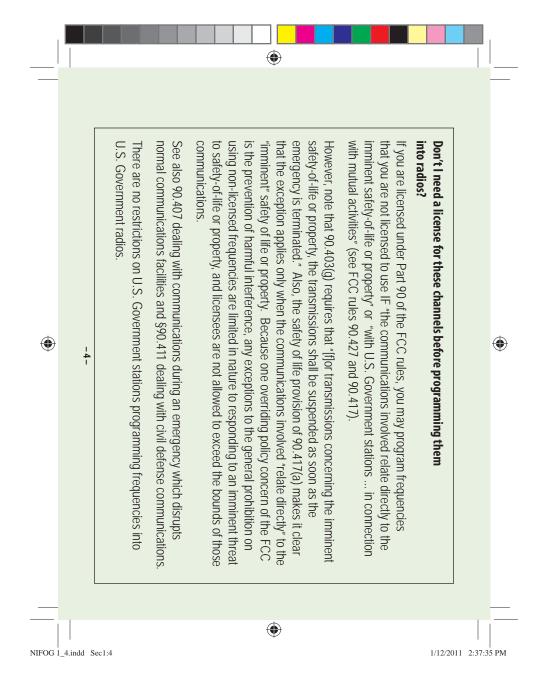


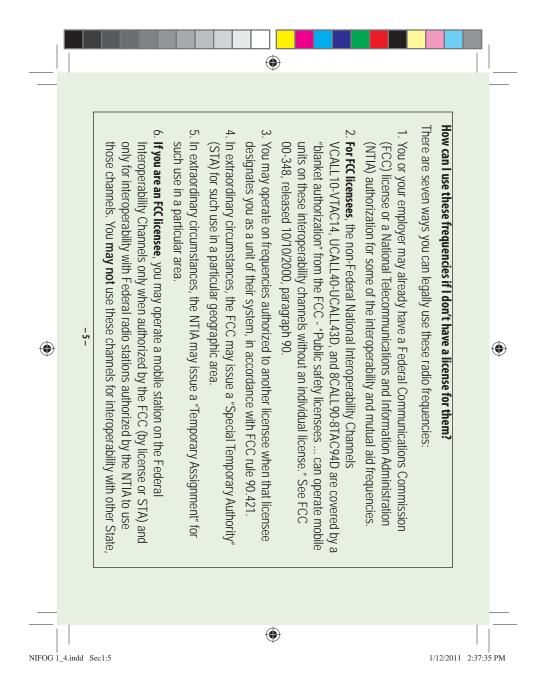


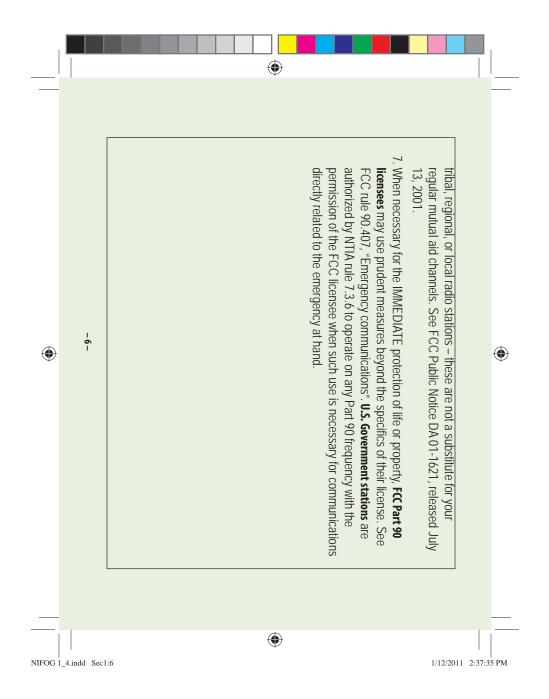


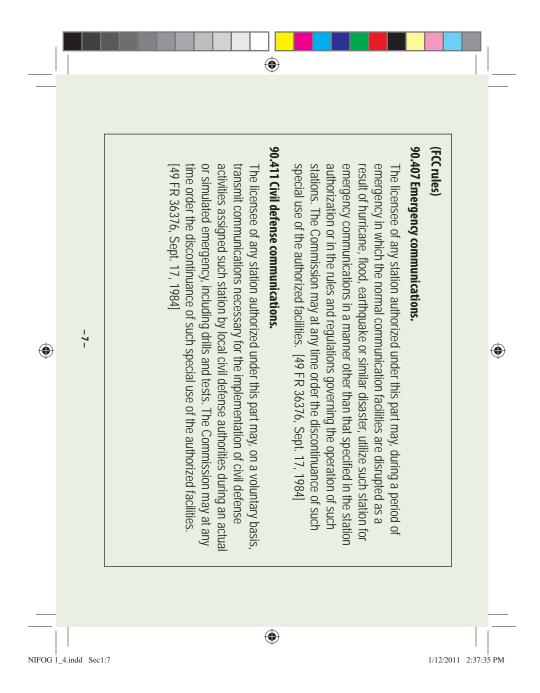


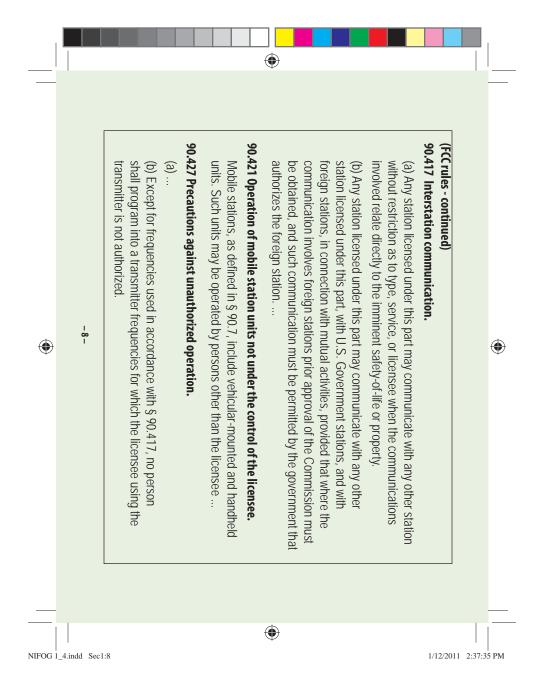


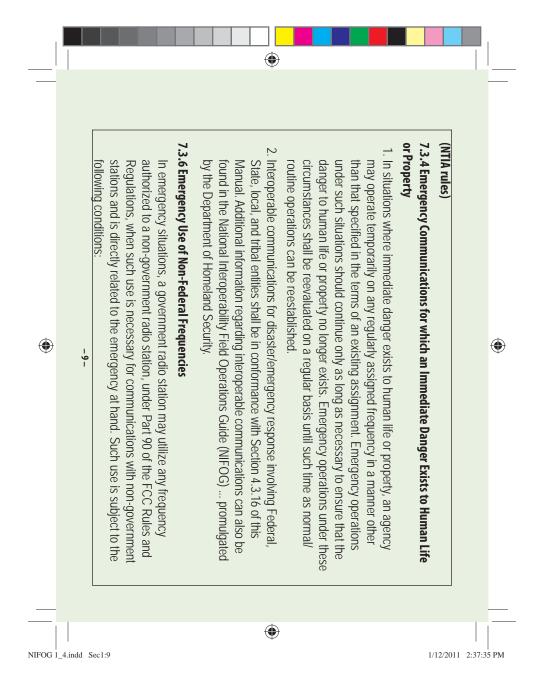


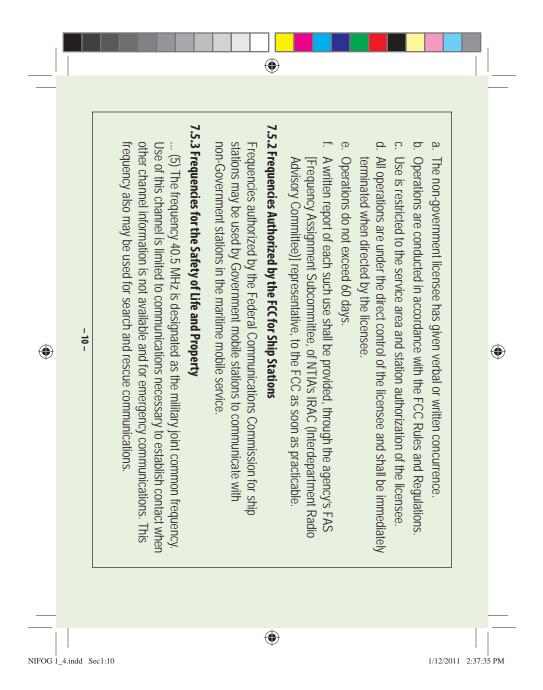


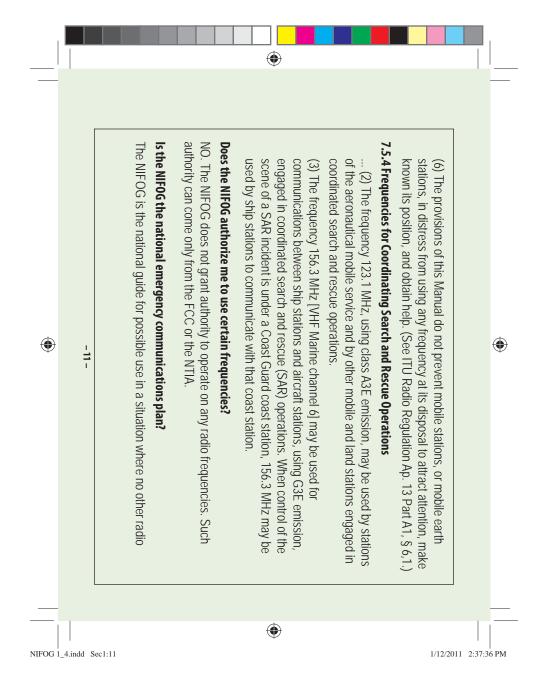

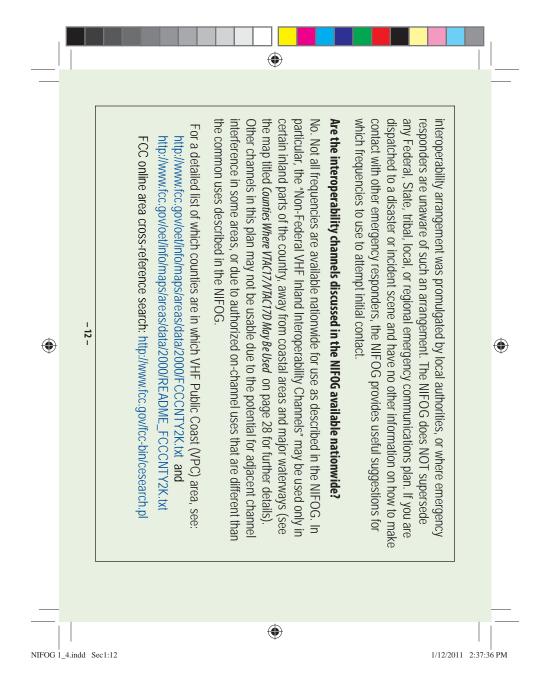


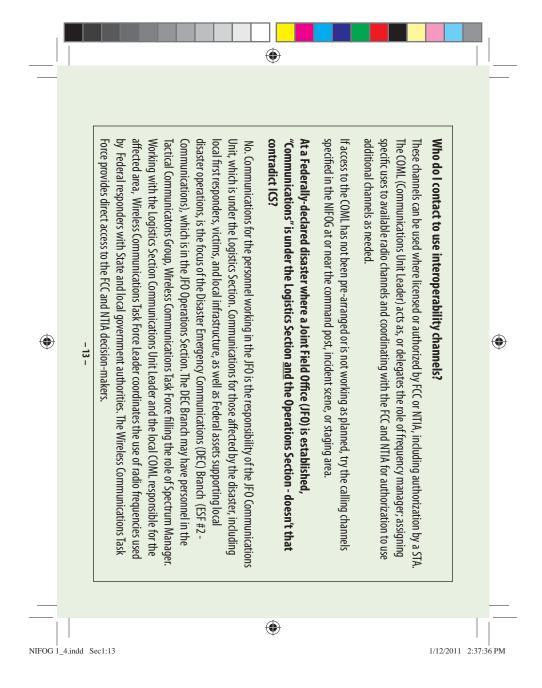


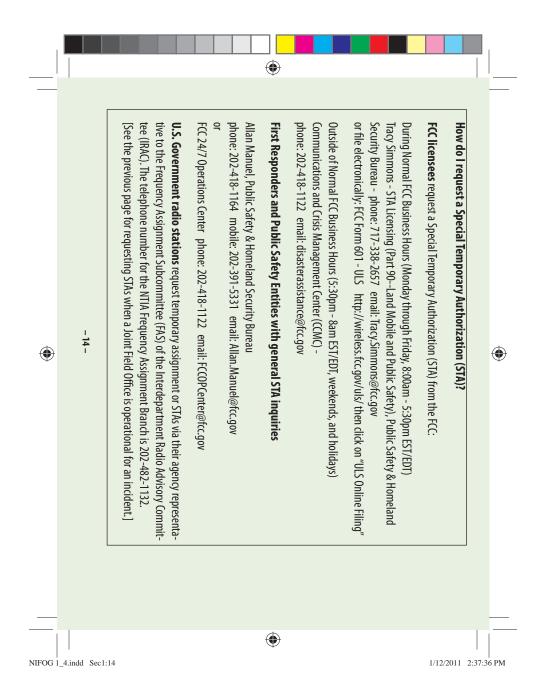


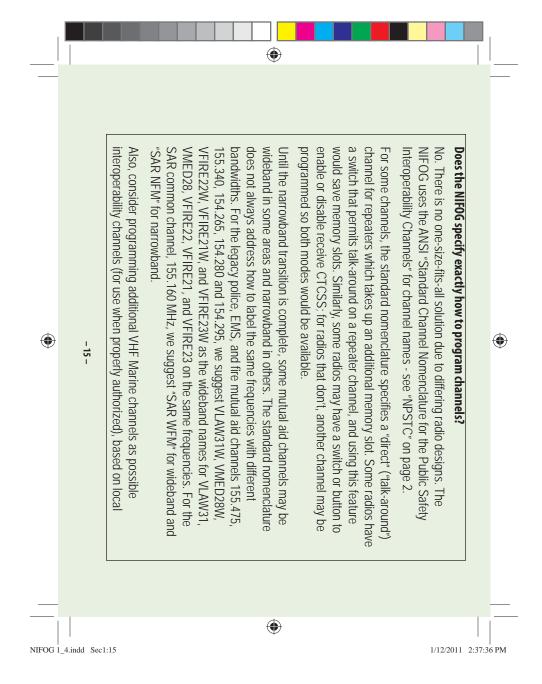





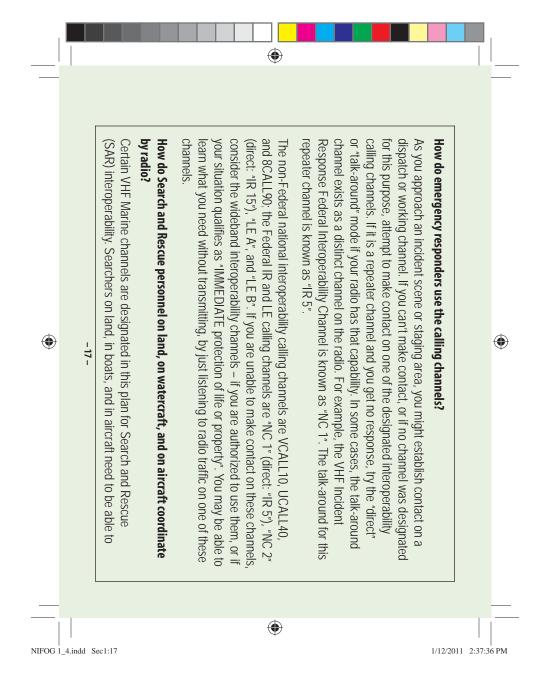


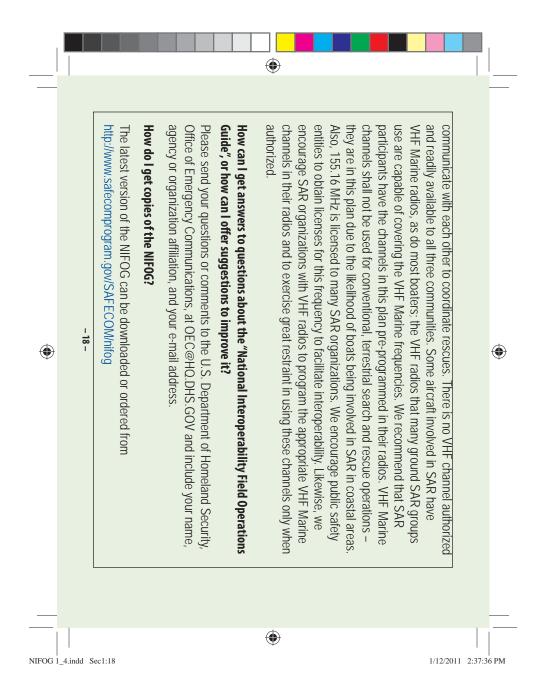


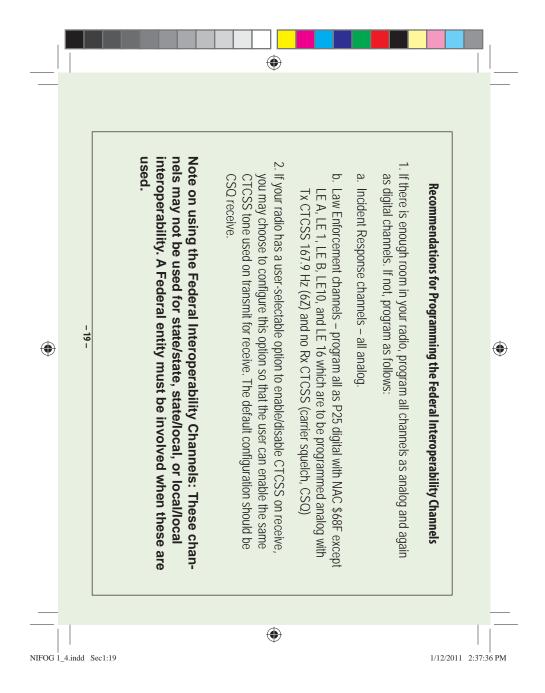


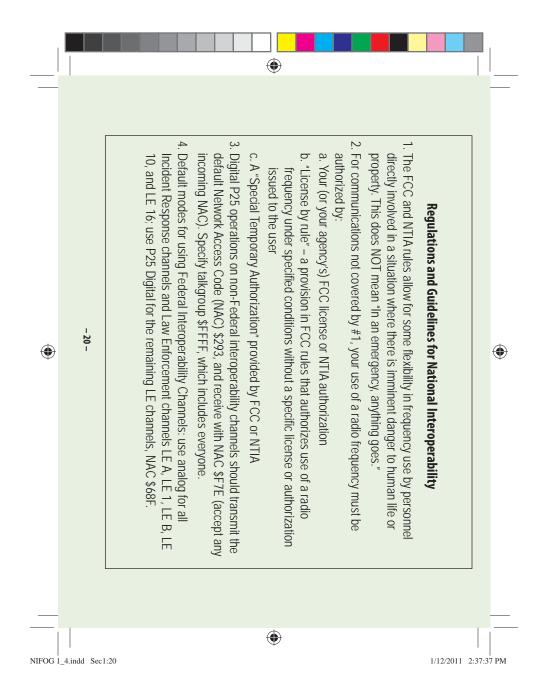

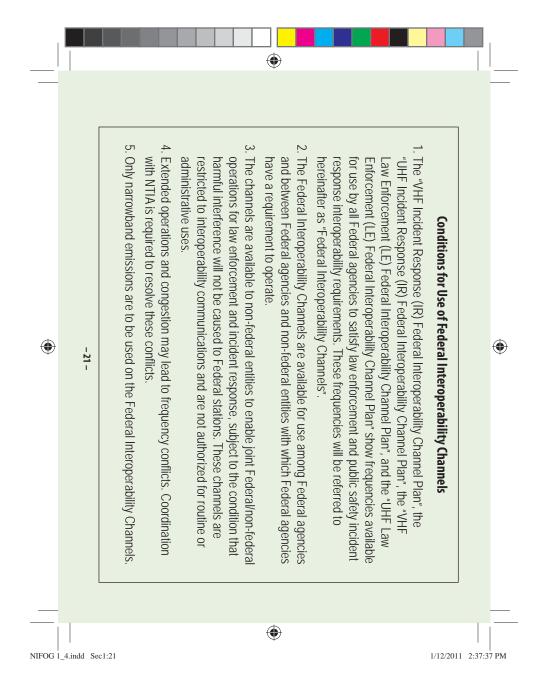

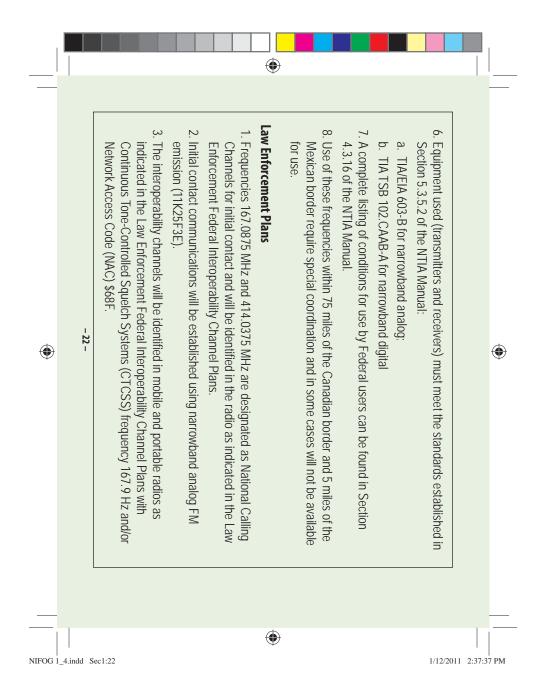

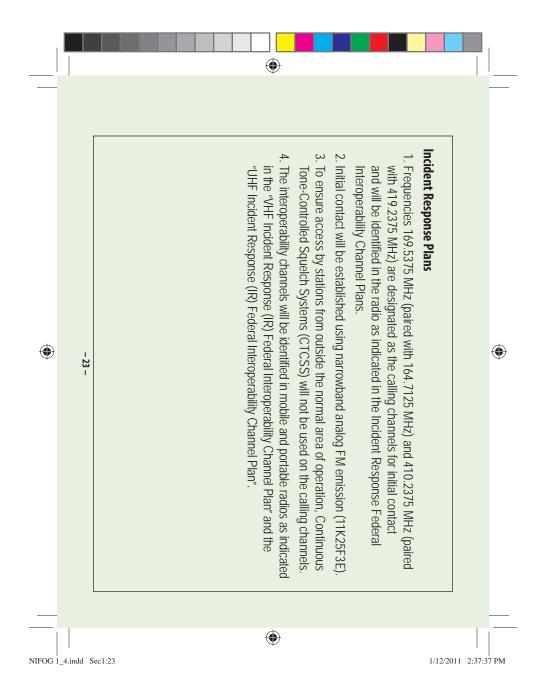

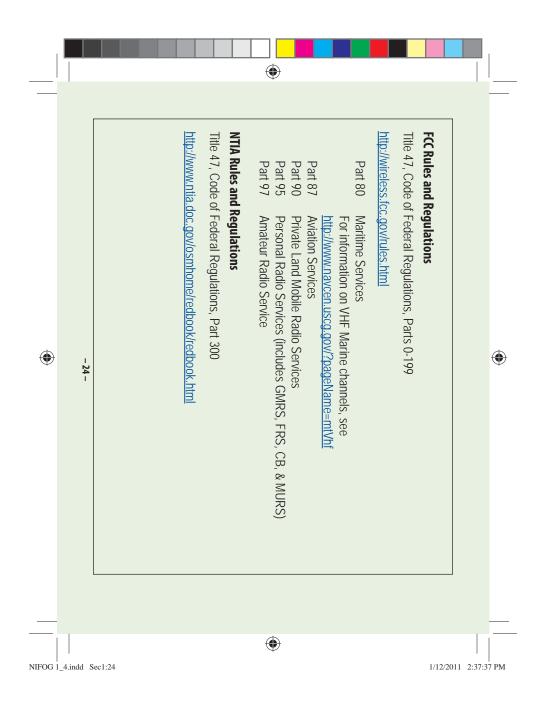

INTERO	PERABILITY CH	ANNELS	
n-Federal VHF N	lational Interop	oerability Chan	nels
Channel	Receive	Transmit	CTCSS Tone \pm
Name	Frequency VHF Low Band	Frequency	
LLAW1	39.4600	45.8600	CSQ /156.7 (5A)
LLAW1D	39.4600	39.4600	CSQ /156.7 (5A)
LFIRE2	39.4800	45.8800	CSQ /156.7 (5A)
LFIRE2D	39.4800	39.4800	CSQ /156.7 (5A)
LLAW3	45.8600	39.4600	CSQ /156.7 (5A)
LLAW3D	45.8600	45.8600	CSQ /156.7 (5A)
LFIRE4	45.8800	39.4800	CSQ /156.7 (5A)
LFIRE4D	45.8800	45.8800	CSQ /156.7 (5A)
MHz is pending	FCC assignme	nt for exclusive	fire intersystem use.
ould be carrier squ amming the radio nstructed how and	uelch receive, CT(, the indicated CT when to enable/c	CSS transmit. If th CSS tone also co lisable.	ie user can enable/ uld be programmed for
	INTERO	INTEROPERABILITY CH T-Federal VHF National Intero Receive Name Frequency VHF Low Band LAW1 39.4600 LLAW1 39.4600 LFIRE2 39.4800 LFIRE2 39.4800 LFIRE2D 39.4800 LFIRE2D 39.4800 LFIRE4 45.8800 LFIRE4 45.8800 LFIRE4 45.8800 LFIRE4 45.8800 MHz is pending FCC assignme Stucted how and when to enable/c	ROPERABILITY CHAI Frequency Frequency VHF Low Band 39.4600 39.4600 39.4600 39.4800 39.4800 39.4800 45.8600 45.8600 45.8800 45.8800 45.8800 45.8800 45.8800 45.8800 45.8800 45.8800 45.8800 45.8800 45.8800 45.8800 45.8800 45.8800 45.8800 45.8800 45.8800 45.8800 45.8800 45.8800 45.8800 45.8800 45.8800 45.8800 45.8800 45.8800 45.8800 45.8800 45.8800 45.8800 45.8800 45.8800 45.8800 45.8800 45.8800 45.8800 45.890 45.890 45.800 45.800 45.800 45.800 45.800 45.800 45.800 45.800 45.800 45.800

- 25 -

۲

NIFOG 1_4.indd Sec1:25

1/12/2011 2:37:37 PM

۲

۲

VTAC11-12, VTAC33-34, and VTAC36-37 may not be used in Puerto Rico or the USVI. ±Default operation should be carrier squelch receive, CTCSS transmit. If the user can enable/disable without reprogramming the radio, the indicated CTCSS tone also could be programmed for receive, and the user instructed how and when to enable/disable. •VTAC33-38 recommended for deployable tactical repeater use only (FCC Station Class FB2T). •VTAC36-38 are preferred; VTAC33-35 should be used only when necessary due to interference.	Tac Rpt VTAC38• 158.7375 159.4725 CSQ / 136.5 (Tac Rpt VTAC37• 154.4525 158.7375 CSQ / 136.5 (Tac Rpt VTAC36*• 151.1375 159.4725 CSQ / 136.5 (Tac Rpt VTAC35• 159.4725 158.7375 CSQ / 136.5 (Tac Rpt VTAC34*• 158.7375 154.4525 CSQ / 136.5 (Tac Rpt VTAC33 *• 159.4725 151.1375 CSQ / 136.5 (Tactical VTAC14 159.4725 159.4725 CSQ / 156.7 (5)	Tactical VTAC13 158.7375 158.7375 CSQ / 156.7 (5	Tactical VTAC12* 154.4525 154.4525 CSQ / 156.7 (5	Tactical VTAC11* 151.1375 151.1375 CSQ / 156.7 (5	Calling VCALL10 155.7525 155.7525 CSQ / 156.7 (5	Description Channel Name Receive Freq. Transmit Freq. CTCSS Ton	VHF High Band	Non-Federal VHF National Interoperability Channels
SVI. an enable/disable nmed for receive, and Jass FB2T). interference.	CSQ / 136.5 (4Z)	CSQ / 136.5 (4Z)	CSQ / 136.5 (4Z)	CSQ / 136.5 (4Z)	CSQ / 136.5 (4Z)	CSQ / 136.5 (4Z)	CSQ /156.7 (5A) ±	CSQ / 156.7 (5A) ±	CSQ / 156.7 (5A) ±	CSQ / 156.7 (5A) ±	CSQ / 156.7 (5A) ±	CTCSS Tone		S

- 26 –

NIFOG 1_4.indd Sec1:26



	VHF Inland	and	
Description	Channel Name	Mobile RX (MHz)	Mobile TX (MHz)
Tactical – narrowband FM	VTAC17	161.8500	157.2500
Tactical – narrowband FM	VTAC17D	161.8500	161.8500
For VTAC17/VTAC17D only: Base stations: 50 watts max, antenna HAAT 400 feet max. Mobile stations: 20 watts max, antenna HAAT 15 feet max. These channels are for tactical use and may not be operated on board aircraft in flight. These channels use narrowband FM and are available only in certain inland areas at least 100 miles from a major waterway. These channels use the same	se stations: 50 watts HAAT 15 feet max. Th light. These channel:	max, antenna HAAT 400 vese channels are for tac	
	0 miles from a majo el 25, which uses wi	be operated on board aircraft in flight. These channels use narrowband FM and are available only in certain inland areas at least 100 miles from a major waterway. These channels use the same frequencies as VHF Marine channel 25, which uses wideband FM. Use only where authorized. See	I feet max. Mobile tical use and may not d are available only iels use the same iere authorized. See

•


- 27 -

1/12/2011 2:37:37 PM

۲

۲

NIFOG 1_4.indd Sec1:27

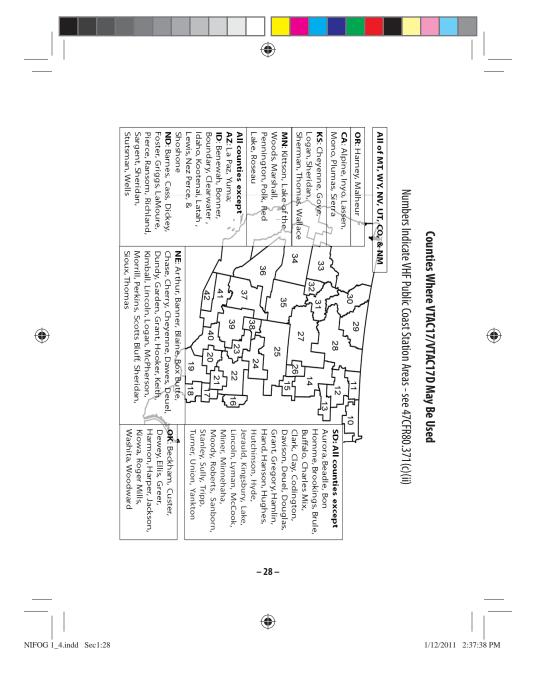

Non-Fed	eral UHF National Inte	Non-Federal UHF National Interoperability Repeater Channels	Channels
Description	Channel Name	Mobile RX (MHz)	Mobile TX (MHz)
Calling	UCALL40	453.2125	458.2125
Calling	UCALL40D	453.2125	453.2125
Tactical	UTAC41	453.4625	458.4625
Tactical	UTAC41D	453.4625	453.4625
Tactical	UTAC42	453.7125	458.7125
Tactical	UTAC42D	453.7125	453.7125
Tactical	UTAC43	453.8625	458.8625
Tactical	UTAC43D	453.8625	453.8625
Default operation should enable/disable CTCSS v be programmed for rece	t be carrier squelch receiv without reprogramming th ive, and the user instruct	Default operation should be carrier squelch receive, CTCSS 156.7(5A) transmit. If the user can enable/disable CTCSS without reprogramming the radio, the indicated CTCSS tone also could be programmed for receive, and the user instructed how and when to enable/disable.	smit. If the user can SS tone also could e/disable.

•

- 29 -

NIFOG 1_4.indd Sec1:29

1/12/2011 2:37:38 PM

700 MHz Interoperability Channels										
	Channel iber Load)	Transmit and Receive	Primary Use	Channel Name						
Receive Ch.	Transmit Ch.	Frequencies		Name						
23-24	983-984	799.14375	General	7TAC51						
	23-24	769.14375	Public Safety	7TAC51D						
39-40	999-1000	799.24375	Calling	7CALL50						
	39-40	769.24375	Channel	7CALL50D						
63-64	1023-1024	799.39375	EMS	7MED65						
	63-64	769.39375		7MED65D						
79-80	1039-1040	799.49375	EMS	7MED66						
	79-80	769.49375		7MED66D						
103-104	1063-1064	799.64375	General	7TAC52						
	103-104	769.64375	Public Safety	7TAC52D						
119-120	1079-1080	799.74375	General	7TAC55						
	119-120	769.74375	Public Safety	7TAC55D						
143-144	1103-1104	799.89375	Fire	7FIRE63						
	143-144	769.89375		7FIRE63D						
159-160	1119-1120	799.99375	Fire	7FIRE64						
	159-160	769.99375		7FIRE64D						
183-184	1143-1144	800.14375	General	7TAC53						
	183-184	770.14375	Public Safety	7TAC53D						
199-200	1159-1160	800.24375	General	7TAC56						
	199-200	770.24375	Public Safety	7TAC56D						
223-224	1183-1184	800.39375	Law	7LAW61						
	223-224	770.39375	Enforcement	7LAW61D						

- 30 -

NIFOG 1_4.indd Sec1:30

۲



		۲			

	Channel iber Load)	Transmit and Receive	Primary Use	Channel Name
Receive Ch.	Transmit Ch.	Frequencies		Name
239-240	1199-1200	800.49375	Law	7LAW62
	239-240	770.49375	Enforcement	7LAW62D
263-264	1223-1224	800.64375	General	7TAC54
	263-264	770.64375	Public Safety	7TAC54D
279-280	1239-1240	800.74375	Mobile Data	7DATA69
	279-280	770.74375		7DATA69D
303-304	1263-1264	800.89375	Mobile	7MOB59
	303-304	770.89375	Repeater	7MOB59D
319-320	1279-1280	800.99375	Other Public	7GTAC57
	319-320	770.99375	Service	7GTAC57D
641-642	1601-1602	803.00625	EMS	7MED86
	641-642	773.00625		7MED86D
657-658	1617-1618	803.10625	General	7TAC71
	657-658	773.10625	Public Safety	7TAC71D
681-682	1641-1642	803.25625	Calling	7CALL70
	681-682	773.25625	Channel	7CALL70D
697-698	1657-1658	803.35625	EMS	7MED87
	697-698	773.35625		7MED87D
721-722	1681-1682	803.50625	Fire	7FIRE83
	721-722	773.50625		7FIRE83D
737-738	1697-1698	803.60625	General	7TAC72
	737-738	773.60625	Public Safety	7TAC72D

۲

- 31 -

NIFOG 1_4.indd Sec1:31

۲



	۲		

	Channel iber Load)	Transmit and Receive	Primary Use	Channel Name
Receive Ch.	Transmit Ch.	Frequencies		Name
761-762	1721-1722	803.75625	General	7TAC75
	761-762	773.75625	Public Safety	7TAC75D
777-778	1737-1738	803.85625	Fire	7FIRE84
	777-778	773.85625		7FIRE84D
801-802	1761-1762	804.00625	Law	7LAW81
	801-802	774.00625	Enforcement	7LAW81D
817-818	1777-1778	804.10625	General	7TAC73
	817-818	774.10625	Public Safety	7TAC73D
841-842	1801-1802	804.25625	General	7TAC76
	841-842	774.25625	Public Safety	7TAC76D
857-858	1817-1818	804.35625	Law	7LAW82
	857-858	774.35625	Enforcement	7LAW82D
881-882	1841-1842	804.50625	Mobile	7MOB79
	881-882	774.50625	Repeater	7MOB79D
897-898	1857-1858	804.60625	General	7TAC74
	897-898	774.60625	Public Safety	7TAC74D
921-922	1881-1882	804.75625	Mobile Data	7DATA89
	921-922	774.75625		7DATA89D
937-938	1897-1898	804.85625	Other Public	7GTAC77
12.5111	937-938	774.85625	Service	7GTAC77D

12.5 kHz narrowband channels shown as odd-even channel pairs of 6.25 kHz channels. Ref: http://www.apco911.org/frequency/documents/700_NB_channel_centers.pdf

- 32 -

NIFOG 1_4.indd Sec1:32

۲



DescriptionCh. NameMobile RX (MHz)*Mobile TX (MHz)*Calling $8CALL90$ 851.0125 (866.0125) 806.0125 (821.0125)Calling – Direct $8CALL90D$ 851.0125 (866.0125) 806.0125 (866.0125)Tactical – Direct $8TAC91D$ 851.5125 (866.5125) 851.5125 (866.5125)Tactical – Direct $8TAC92D$ 852.0125 (867.0125) 851.5125 (866.5125)Tactical – Direct $8TAC92D$ 852.0125 (867.0125) 852.0125 (867.0125)Tactical – Direct $8TAC93D$ 852.5125 (867.5125) 852.5125 (867.5125)Tactical – Direct $8TAC93D$ 852.5125 (867.5125) 852.5125 (867.5125)Tactical – Direct $8TAC94D$ 853.0125 (867.5125) 852.5125 (867.5125)Tactical – Direct $8TAC94D$ 853.0125 (868.0125) 852.0125 (867.5125)Default operation should be carrier squelch receive, CTCSS 156.7(5A) transmit. If the user can enable/disable CTCSS without reprogramming the radio, the indicated CTCSS tone could also be programmed for receive, and the user instructed how and when to enable/disable."The frequency in parenthesis, which is 15 MHz higher, is the frequency used before rebanding - channel names were ICALL, ITAC1 - ITAC4. Wideband FM 20K0F3E before and after rebanding - the frequency in parenthesis.	Non	-Federal 800 /	Non-Federal 800 MHz National Mutual Aid Repeater Channels	ater Channels
Calling 8CALL90 851.0125 (866.0125) 806.0125 (821.0125) Calling – Direct 8TAC91 851.0125 (866.0125) 851.0125 (866.0125) Tactical Direct 8TAC91D 851.5125 (866.5125) 806.5125 (821.5125) Tactical – Direct 8TAC91D 851.5125 (866.5125) 807.0125 (862.0125) Tactical – Direct 8TAC92D 852.0125 (867.0125) 807.0125 (822.0125) Tactical – Direct 8TAC93D 852.5125 (867.5125) 807.5125 (867.0125) Tactical – Direct 8TAC93D 852.5125 (867.5125) 807.5125 (822.5125) Tactical – Direct 8TAC93D 852.5125 (867.5125) 807.5125 (822.5125) Tactical – Direct 8TAC94D 853.0125 (863.0125) 808.0125 (823.0125) Tactical – Direct 8TAC94D 853.0125 (868.0125) 808.0125 (823.0125) Tactical – Direct 8TAC94D 853.0125 (868.0125) 808.0125 (823.0125) Default operation should be carrier squelch receive, CTCSS 156.7(5A) transmit. If the user can enable/disable CTCSS without reprogramming the radio, the indicated CTCSS to re could also be programmed for receive, and the user instructed how and when to enable/disable. "The frequency in parenthesis, w	Description	Ch. Name	Mobile RX (MHz)*	Mobile TX (MHz)*
Calling – Direct 8CALL90D 851.0125 (866.0125) 851.0125 (866.0125) Tactical 8TAC91 851.5125 (866.5125) 806.5125 (821.5125) Tactical – Direct 8TAC91D 851.5125 (866.5125) 807.0125 (866.5125) Tactical – Direct 8TAC92D 852.0125 (867.0125) 807.0125 (822.0125) Tactical – Direct 8TAC93D 852.0125 (867.0125) 807.5125 (867.0125) Tactical – Direct 8TAC93D 852.5125 (867.5125) 807.5125 (822.5125) Tactical – Direct 8TAC93D 852.5125 (867.5125) 807.5125 (867.5125) Tactical – Direct 8TAC94D 853.0125 (867.5125) 807.5125 (867.5125) Tactical – Direct 8TAC94D 853.0125 (868.0125) 808.0125 (868.0125) Tactical – Direct 8TAC94D 853.0125 (868.0125) 808.0125 (868.0125) Default operation should be carrier squelch receive, CTCSS 156.7(5A) transmit. If the user can enable/disable CTCSS without reprogramming the radio, the indicated CTCSS tone could also be programmed for receive, and the user instructed how and when to enable/disable. *The frequency in parenthesis, which is 15 MHz higher, is the frequency used before rebanding - thannel names were ICALL, ITAC1 - ITAC4. Wideband FM 20K0F3E before and after rebanding.	Calling	8CALL90	851.0125 (866.0125)	806.0125 (821.0125)
Tactical 8TAC 91 851.5125 (866.5125) 806.5125 (821.5125 (867.125) Tactical – Direct 8TAC 91D 851.5125 (866.5125) 851.5125 (866.5125) Tactical – Direct 8TAC 92 852.0125 (867.0125) 807.0125 (862.0125 (867.0125)) Tactical – Direct 8TAC 93D 852.5125 (867.5125) 807.5125 (867.0125) Tactical – Direct 8TAC 93D 852.5125 (867.5125) 807.5125 (867.5125) Tactical – Direct 8TAC 93D 852.5125 (867.5125) 807.5125 (867.5125) Tactical – Direct 8TAC 94 853.0125 (868.0125) 808.0125 (863.0125) Tactical – Direct 8TAC 94D 853.0125 (868.0125) 808.0125 (868.0125) Default operation should be carrier squelch receive, CTCSS 156.7(5A) transmit. If the user can enable/disable CTCSS without reprogramming the radio, the indicated CTCSS tone could also be programmed for receive, and the user instructed how and when to enable/disable. 'The frequency in parenthesis, which is 15 MHz higher, is the frequency used before rebanding - thannel names were ICALL, ITAC1 - ITAC4. Wideband FM 20K0F3E before and after rebanding.	Calling - Direct	8CALL90D	851.0125 (866.0125)	851.0125 (866.0125)
Tactical – Direct 8TAC91D 851.5125 (866.5125) 851.5125 (866.5125) Tactical 8TAC92 852.0125 (867.0125) 807.0125 (822.0125) Tactical – Direct 8TAC92D 852.0125 (867.0125) 852.0125 (867.0125) Tactical – Direct 8TAC93D 852.5125 (867.5125) 807.5125 (822.5125 (867.5125)) Tactical – Direct 8TAC93D 852.5125 (867.5125) 807.5125 (823.0125) Tactical – Direct 8TAC94D 853.0125 (868.0125) 808.0125 (823.0125) Tactical – Direct 8TAC94D 853.0125 (868.0125) 808.0125 (868.0125) Default operation should be carrier squelch receive, CTCSS 156.7(5A) transmit. If the user can enable/disable CTCSS without reprogramming the radio, the indicated CTCSS tone could also be programmed for receive, and the user instructed how and when to enable/disable. *The frequency in parenthesis, which is 15 MHz higher, is the frequency used before rebanding - channel names were ICALL, ITAC1 - ITAC4. Wideband FM 20K0F3E before and after rebanding.	Tactical	8TAC91	851.5125 (866.5125)	806.5125 (821.5125)
Tactical 8TAC92 852.0125 (867.0125) 807.0125 (822.0125 (867.0125) Tactical – Direct 8TAC92D 852.0125 (867.0125) 852.0125 (867.0125) Tactical – Direct 8TAC93D 852.5125 (867.5125) 807.5125 (867.5125) Tactical – Direct 8TAC93D 852.5125 (867.5125) 807.5125 (867.5125) Tactical – Direct 8TAC94 853.0125 (868.0125) 808.0125 (868.0125) Tactical – Direct 8TAC94D 853.0125 (868.0125) 808.0125 (868.0125) Default operation should be carrier squelch receive, CTCSS 156.7(5A) transmit. If the user can enable/disable CTCSS without reprogramming the radio, the indicated CTCSS tone could also be programmed for receive, and the user instructed how and when to enable/disable. *The frequency in parenthesis, which is 15 MHz higher, is the frequency used before rebanding - channel names were ICALL, ITAC1 - ITAC4. Wideband FM 20K0F3E before and after rebanding.	Tactical – Direct	8TAC91D	851.5125 (866.5125)	851.5125 (866.5125)
Tactical – Direct 8TAC92D 852.0125 (867.0125) 852.0125 (867.0125) Tactical 8TAC93 852.5125 (867.5125) 807.5125 (822.5125) Tactical – Direct 8TAC93D 852.5125 (867.5125) 807.5125 (822.5125) Tactical – Direct 8TAC94D 852.5125 (867.5125) 852.5125 (867.5125) Tactical – Direct 8TAC94D 853.0125 (868.0125) 808.0125 (868.0125) Tactical – Direct 8TAC94D 853.0125 (868.0125) 808.0125 (868.0125) Default operation should be carrier squelch receive, CTCSS 156.7(5A) transmit. If the user can enable/disable CTCSS without reprogramming the radio, the indicated CTCSS tone could also be programmed for receive, and the user instructed how and when to enable/disable. *The frequency in parenthesis, which is 15 MHz higher, is the frequency used before rebanding - channel names were ICALL, ITAC1 - ITAC4. Wideband FM 20K0F3E before and after rebanding.	Tactical	8TAC92	852.0125 (867.0125)	807.0125 (822.0125)
Tactical8TAC93852.5125 (867.5125)807.5125 (822.5125)Tactical – Direct8TAC93D852.5125 (867.5125)852.5125 (867.5125)Tactical8TAC94853.0125 (868.0125)808.0125 (863.0125)Tactical – Direct8TAC94D853.0125 (868.0125)808.0125 (868.0125)Default operation should be carrier squelch receive, CTCSS 156.7(5A) transmit. If the user can enable/disable CTCSS without reprogramming the radio, the indicated CTCSS tone could also be programmed for receive, and the user instructed how and when to enable/disable.*The frequency in parenthesis, which is 15 MHz higher, is the frequency used before rebanding - channel names were ICALL, ITAC1 - ITAC4. Wideband FM 20K0F3E before and after rebanding.	Tactical – Direct	8TAC92D	852.0125 (867.0125)	852.0125 (867.0125)
Tactical – Direct8TAC93D852.5125 (867.5125)852.5125 (867.5125)Tactical8TAC94853.0125 (868.0125)808.0125 (823.0125)Tactical – Direct8TAC94D853.0125 (868.0125)808.0125 (868.0125)Default operation should be carrier squelch receive, CTCSS 156.7(5A) transmit. If the user can enable/disable CTCSS without reprogramming the radio, the indicated CTCSS tone could also be programmed for receive, and the user instructed how and when to enable/disable.*The frequency in parenthesis, which is 15 MHz higher, is the frequency used before rebanding - channel names were ICALL, ITAC1 - ITAC4. Wideband FM 20K0F3E before and after rebanding.	Tactical	8TAC93	852.5125 (867.5125)	807.5125 (822.5125)
Tactical8TAC94853.0125 (868.0125)808.0125 (823.0125)Tactical – Direct8TAC94D853.0125 (868.0125)853.0125 (868.0125)Default operation should be carrier squelch receive, CTCSS 156.7(5A) transmit. If the user can enable/disable CTCSS without reprogramming the radio, the indicated CTCSS tone could also be programmed for receive, and the user instructed how and when to enable/disable.*The frequency in parenthesis, which is 15 MHz higher, is the frequency used before rebanding - channel names were ICALL, ITAC1 - ITAC4. Wideband FM 20K0F3E before and after rebanding.	Tactical – Direct	8TAC93D	852.5125 (867.5125)	852.5125 (867.5125)
Tactical – Direct 8TAC94D 853.0125 (868.0125) 853.0125 (868.0125) Default operation should be carrier squelch receive, CTCSS 156.7(5A) transmit. If the user can enable/disable CTCSS without reprogramming the radio, the indicated CTCSS tone could also be programmed for receive, and the user instructed how and when to enable/disable. *The frequency in parenthesis, which is 15 MHz higher, is the frequency used before rebanding - channel names were ICALL, ITAC1 - ITAC4. Wideband FM 20K0F3E before and after rebanding.	Tactical	8TAC94	853.0125 (868.0125)	808.0125 (823.0125)
Default operation should be carrier squelch receive, CTCSS 156.7(5A) transmit. If the user can enable/disable CTCSS without reprogramming the radio, the indicated CTCSS tone could also be programmed for receive, and the user instructed how and when to enable/disable. *The frequency in parenthesis, which is 15 MHz higher, is the frequency used before rebanding - channel names were ICALL, ITAC1 - ITAC4. Wideband FM 20K0F3E before and after rebanding.	Tactical – Direct	8TAC94D	853.0125 (868.0125)	853.0125 (868.0125)
	Default operation s enable/disable CT0 be programmed for *The frequency in r channel names we	hould be carrier CSS without rep receive, and th parenthesis, whi re ICALL, ITAC	squelch receive, CTCSS 156.7(5/ rogramming the radio, the indicate e user instructed how and when to ch is 15 MHz higher, is the frequer I - ITAC4. Wideband FM 20K0F3E	 b) transmit. If the user can d CTCSS tone could also enable/disable. cy used before rebanding - before and after rebanding.

÷ - 33 -

NIFOG 1_4.indd Sec1:33

1/12/2011 2:37:39 PM

۲

Suggested Assignment Channel Note Mobile RX I	Channel	Note	Mobile RX	Mobile TX
(subject to availability & local plans)	NC 1	Calling	(MHz)	(MHz)
Incident Calling Incident Command 1	IR 1	Calling	169.5375 170.0125	164.7125 165.2500
Medical Evacuation Control	IR 2		170.4125	165.9625
Logistics Control	IR 3		170.6875	166.5750
Interagency Convoy	IR 4		173.0375	167.3250
Incident Calling (Direct)	IR 5	Direct for NC 1 Calling	169.5375	169.5375 (S)
Incident Command 1 (Direct)	IR 6	Direct for IR 1	170.0125	170.0125 (S)
Medical Evacuation Control (Direct)	IR 7	Direct for IR 2	170.4125	170.4125 (S)
Logistics Control (Direct)	IR 8	Direct for IR 3	170.6875	170.6875 (S)
Interagency Convoy (Direct)	IR 9	Direct for IR 4	173.0375	173.0375 (S)
*See "Conditions for Use of Federal Interoperability Channels" on pages 22 - 24. Default operation should be carrier squelch receive, CTCSS 167.9/CSQ transmit. If the user can enable/disable CTCSS without reprogramming the radio, the indicated CTCSS tone also could be programmed for receive, and the user instructed how and when to enable/disable.	ral Interoperabil r squelch receiprogramming th user instructed	ity Channels" on pa ve, CTCSS 167.9/C e radio, the indicate how and when to e	iges 22 - 24. SQ transmit. If t ed CTCSS tone nable/disable.	he user can also could be
	- 34 -	4 -		

- 34 -

۲

NIFOG 1_4.indd Sec1:34

1/12/2011 2:37:39 PM

۲

UHF Incident Response (IR) Federal Interoperability Channel Plan	e (IR) Feder	al Interoperabili	ity Channel P	lan
Suggested Assignment	Channel	Note	Mobile RX	Mobile TX
(subject to availability & local plans)	Name		(MHz)	(MHz)
Incident Calling	NC 2	Calling	410.2375	419.2375
Ad hoc assignment	IR 10		410.4375	419.4375
Ad hoc assignment	IR 11		410.6375	419.6375
SAR Incident Command	IR 12		410.8375	419.8375
Ad hoc assignment	IR 13		413.1875	413.1875 (S)
Interagency Convoy	IR 14		413.2125	413.2125 (S)
Incident Calling (Direct)	IR 15	Direct for NC 2	410.2375	410.2375 (S)
		Calling		
Ad hoc assignment (Direct)	IR 16	Direct for IR 10 410.4375	410.4375	410.4375 (S)
Ad hoc assignment (Direct)	IR 17	Direct for IR 11 410.6375	410.6375	410.6375 (S)
SAR Incident Command (Direct)	IR 18	Direct for IR 12 410.8375	410.8375	410.8375 (S)
*See "Conditions for Use of Federal Interoperability Channels" on pages 22 - 24. Default operation should be carrier squeich receive, CTCSS 167.9/CSQ transmit. If the user can enable/disable CTCSS without reprogramming the radio, the indicated CTCSS tone also could be programmed for receive, and the user instructed how and when to enable/disable	iteroperability uelch receive ramming the instructed hc	Channels" on page , CTCSS 167.9/CS radio, the indicated w and when to ena	es 22 - 24. Q transmit. If th CTCSS tone a Ible/disable	ie user can ilso could be

۲

- 35 -

NIFOG 1_4.indd Sec1:35

1/12/2011 2:37:39 PM

M	F Law Enfo	VHF Law Enforcement (LE) Federal Interoperability Channel Plan	eral Interopera	bility Channel P	an
Description	Channel Name	Note	Mobile RX (MHz)	Mobile TX (MHz)	CTCSS or NAC
Calling	LE A	Analog	167.0875	167.0875 (S)	167.9 Tx, CSQ Rx
Tactical	LE 1	Analog	167.0875	162.0875	167.9 Tx, CSQ Rx
Tactical	LE 2		167.2500	162.2625	\$68F
Tactical	LE 3		167.7500	162.8375	\$68F
Tactical	LE 4		168.1125	163.2875	\$68F
Tactical	LE 5		168.4625	163.4250	\$68F
Tactical	LE 6	Direct for LE 2	167.2500	167.2500 (S)	\$68F
Tactical	LE 7	Direct for LE 3	167.7500	167.7500 (S)	\$68F
Tactical	LE 8	Direct for LE 4	168.1125	168.1125 (S)	\$68F
Tactical	LE 9	Direct for LE 5	168.4625	168.4625 (S)	\$68F
*See "Condition CTCSS on rece	s for Use of ive only if u	*See "Conditions for Use of Federal Interoperability Channels" on pages 22 - 24. CTCSS on receive only if user selectable; else CSQ.	ility Channels" on CSQ.	pages 22 - 24.	
		ĸ			

- 36 -

NIFOG 1_4.indd Sec1:36

1/12/2011 2:37:39 PM

۲

_	HF Law En	UHF Law Enforcement (LE) Federal Interoperability Channel Plan	deral Interope	erability Chann	el Plan
Description	Channel Name	Note	Mobile RX (MHz)	Mobile TX (MHz)	CTCSS or NAC
Calling	LE B	Analog	414.0375	414.0375 (S)	414.0375 (S) 167.9 Tx, CSQ Rx
Tactical	LE 10	Analog	409.9875	418.9875	167.9 Tx, CSQ Rx
Tactical	LE 11		410.1875	419.1875	\$68F
Tactical	LE 12		410.6125	419.6125	\$68F
Tactical	LE 13		414.0625	414.0625 (S)	\$68F
Tactical	LE 14		414.3125	414.3125 (S)	\$68F
Tactical	LE 15		414.3375	414.3375 (S)	\$68F
Tactical	LE 16	Direct for LE 10 - Analog	409.9875	409.9875 (S)	409.9875 (S) 167.9 Tx, CSQ Rx
Tactical	LE 17	Direct for LE 11	410.1875	410.1875 (S)	\$68F
Tactical	LE 18	Direct for LE 12	410.6125	410.6125 (S)	\$68F
*See "Conditio CTCSS on rec	ns for Use (eive only if	*See "Conditions for Use of Federal Interoperability Channels" on pages 22 - 24. CTCSS on receive only if user selectable; else CSQ	bility Channels" CSQ	on pages 22 - 24	

- 37 -

NIFOG 1_4.indd Sec1:37

1/12/2011 2:37:39 PM

•

Federa	il/Non-Federal SAR Co	Federal / Non-Federal SAR Command Interoperability Plan	ty Plan
Channel Name*	Mobile RX (MHz)	Mobile TX (MHz)	CTCSS
IR 12**	410.8375	419.8375	167.9 Tx, CSQ Rx
VTAC14	159.4725	159.4725	156.7 Tx, CSQ Rx (156.7 Rx if user selectable)
UTAC43	453.8625	458.8625	156.7 Tx, CSQ Rx (156.7 Rx if user selectable)
8TAC94 (ITAC4 before rebanding)	853.0125 (868.0125 before rebanding)	808.0125 (823.0125 before rebanding)	156.7 Tx, CSQ Rx (156.7 Rx if user selectable)
VHF Marine Ch. 17***	156.8500 (this use requires FCC STA)	156.8500 (this use requires FCC STA)	none
* If a repeater is not av VTAC14D for VTAC14, **See Conditions for U: ***VHF marine ch. 17 i:	* If a repeater is not available, substitute the corresponding talk-arour VTAC14D for VTAC14, VTAC43D for VTAC43, 8TAC94D for 8TAC94 **See Conditions for Use of Federal Interoperability Channels on pag ***VHF marine ch. 17 is wideband FM, emission 16K0F3E.	* If a repeater is not available, substitute the corresponding talk-around channel: IR 18 for IR 12, VTAC14D for VTAC14, VTAC43D for VTAC43, 8TAC94D for 8TAC94. **See Conditions for Use of Federal Interoperability Channels on pages 22 - 24. ***VHF marine ch. 17 is wideband FM, emission 16K0F3E.	annel: IR 18 for IR 12, - 24.

۲

-

- 38 -

Г

NIFOG 1_4.indd Sec1:38

1/12/2011 2:37:39 PM

Frequency (MHz)
155.1600 narrowband FM (or wideband FM till 1/1/2013)
157.050 or 157.150 (VHF Marine ch.21A or 23A) as specified by USCG Sector Commander
123.100 MHz AM (may not be used for tests or exercises)
345.0 MHz AM for initial contact only, then move to 282.8 MHz AM or other working channel
As charted on standard air chart or MULTICOM 122.850 (south or west sector) & 122.900 MHz (north or east sector), or as specified
157.175 83A (21A, 23A, 81A alternates as specified by local USCG Sector Commander) **
157.050 21A (23A, 81A, 83A alternates as specified by local USCG Sector Commander) **
157.175 83A (21A, 23A, 81A alternates as specified by local USCG Sector Commander) **
156.800 VHF Marine channel 16
* Use VHF Marine ch.16 to make contact(30 seconds max.), then move to appropriate working channel as directed by local USCG Sector Commander. Non-maritime use of any VHF Marine channel requires FCC Special Temporary Authority or appropriate license. VHF marine channels use widebannels. 16=156.800 21A=157.050 22A=157.100 23A=157.150 81A=157.075 82A=157.125 83A=157.1750 *** VHF Marine channels. 16=156.800 21A=157.050 22A=157.100 23A=157.150 81A=157.075 82A=157.125 83A=157.1750
155.1600 narrowband FM 157.050 or 157.150 (VHF) USCG Sector Commander 2345.0 MHz AM (may not 345.0 MHz AM for initial co 345.0 MHz AM for initial co 345.0 MHz AM for initial co AM or other working chann AM or other working chann AM or other working channel 157.175 83A (21A, 23A, 81A, 83 USCG Sector Commander 157.175 83A (21A, 23A, 81A, 83 USCG Sector Commander 155.3400 (wideband FM) 156.800 VHF Marine channel 155.3400 (wideband FM) 156.800 VHF Marine channel 156.800 VHF Marine channel 122A=157.100 23A=157.150

•

1/12/2011 2:37:40 PM

۲

۲

NIFOG 1_4.indd Sec1:39

Frequency (MHz)	Usage Wideband ID Narrowband ID	Wideband ID	Narrowband ID	Note
155.1600	Search and Rescue Common	SAR WFM	SAR NFM	Not designated by FCC; availability varies.
154.2650 mobile	Fire Mutual Aid	VFIRE22W	VFIRE22	
154.2725	Fire Mutual Aid		VFIRE24	
154.2800	Fire Mutual Aid	VFIRE21W	VFIRE21	Not available in Duorte Dice
base/mobile				and the LLS Virgin Islands
154.2875			VFIRE25	מוע נוופ ט.ט. עווקווו ואמועט.
154.2950 mobile	Fire Mutual Aid	VFIRE23W	VFIRE23	
154.3025			VFIRE26	
155.3400	EMS Mutual Aid	VMED28W	VMED28	May be designated for EMS
base/mobile				Mutual Aid.
155.3475			VMED29	May be designated for EMS
				Mutual Aid.
155.4750	Law Enforcement	VLAW31W	VLAW31	
base/mobile	Mutual Aid			
155.4825	Law Enforcement		VLAW32	
	IVIUIUAI AIU			
Rules for use of these channels are contained in 47 CFR 90.20 and NTIA Manual Section 4.3.11 & 7.3.6 See also "Non-Federal VHF National Interoperability Channels" and "Non-Federal VHF Inland Interoperability Channels" on page 26 - 28 of this document.	hannels are contained in VHF National Interoper - 28 of this document.	n 47 CFR 90.20 <i>a</i> rability Channels [•]	and NTIA Manual Se and "Non-Federal	Rules for use of these channels are contained in 47 CFR 90.20 and NTIA Manual Section 4.3.11 & 7.3.6. See also "Non-Federal VHF National Interoperability Channels" and "Non-Federal VHF Inland Interoperability Channels" on page 26 - 28 of this document.

•

- 40 -

NIFOG 1_4.indd Sec1:40

۲

1/12/2011 2:37:40 PM

_	

UHF	MED (Medica	l, EMS) Chan	nels
Base & Mobile TX	Mobile TX	Channel Name	Bandwidth
462.950	467.950	MED-9*	W,N,U
462.95625	467.95625	MED-91 *	U
462.9625	467.9625	MED-92 *	N,U
462.96875	467.96875	MED-93 *	U
462.975	467.975	MED-10 *	W,N,U
462.98125	467.98125	MED-101 *	U
462.9875	467.9875	MED-102 *	N,U
462.99375	467.99375	MED-103 *	U
* Used primarily for	dispatch; may be use	d for mutual aid. 47C	FR90.20(d)(65).
463.000	468.000	MED-1	W,N,U
463.00625	468.00625	MED-11	U
463.0125	468.0125	MED-12	N,U
463.01875	468.01875	MED-13	U
463.025	468.025	MED-2	W,N,U
463.03125	468.03125	MED-21	U
Di t l i	A		

Direct mode: receive & transmit on "Base & Mobile TX" freq.; Repeater mode: transmit on "Mobile TX" freq., receive on "Base & Mobile TX" freq. CTCSS as required by local plan. Bandwidth: W=wide, N=narrow, U=ultra-narrow (6.25 kHz). Add "D" to channel name when operating in "Direct" mode.

NIFOG 1_4.indd Sec1:41

۲

۲

- 41 -



_	۲	

UHF	MED (Medica	l, EMS) Chan	nels				
Base & Mobile TX	Mobile TX	Channel Name	Bandwidth				
463.0375	468.0375	MED-22	N,U				
463.04375	468.04375	MED-23	U				
463.050	468.050	MED-3	W,N,U				
463.05625	468.05625	MED-31	U				
463.0625	468.0625	MED-32	N,U				
463.06875	468.06875	MED-33	U				
463.075	468.075	MED-4	W,N,U				
463.08125	468.08125	MED-41	U				
463.0875	468.0875 MED-42 N,U						
463.09375	468.09375	MED-43	U				
463.100	468.100	MED-5	W,N,U				
463.10625	468.10625	MED-51	U				
463.1125	468.1125	MED-52	N,U				
463.11875	468.11875	MED-53	U				
463.125	468.125	MED-6	W,N,U				
Direct mode: receive & transmit on "Base & Mobile TX" freq.; Repeater mode: transmit on "Mobile TX" freq., receive on "Base & Mobile TX" freq. CTCSS as required by local plan. Bandwidth: W=wide, N=narrow, U=ultra-narrow (6.25 kHz). Add "D" to channel name when operating in "Direct" mode.							

NIFOG 1_4.indd Sec1:42

۲

- 42 -



			۲)					

UHF	UHF MED (Medical, EMS) Channels									
Base & Mobile TX	Mobile TX	Channel Name	Bandwidth							
463.13125	468.13125	MED-61	U							
463.1375	468.1375	MED-62	N,U							
463.14375	468.14375	MED-63	U							
463.150	468.150	MED-7	W,N,U							
463.15625	468.15625	MED-71	U							
463.1625	468.1625	MED-72	N,U							
463.16875	468.16875	MED-73	U							
463.175	468.175	MED-8	W,N,U							
463.18125	468.18125	MED-81	U							
463.1875	468.1875	MED-82	N,U							
463.19375	468.19375	MED-83	U							

Direct mode: receive & transmit on "Base & Mobile TX" freq.; Repeater mode: transmit on "Mobile TX" freq., receive on "Base & Mobile TX" freq. CTCSS as required by local plan. Bandwidth: W=wide, N=narrow, U=ultra-narrow (6.25 kHz). Add "D" to channel name when operating in "Direct" mode.

NIFOG 1_4.indd Sec1:43

- 43 -

۲

1/12/2011 2:37:40 PM

	The 25 Cities Pr	oject Federal Interop	oerability Channels
--	------------------	-----------------------	---------------------

The 25 Cities Project Federal Interoperability Channels were developed through the Department of Justice "25 Cities" project to support local, state, federal, and tribal voice communications interoperability. Each metropolitan area has agreed upon policies and procedures regarding use of these channels. Most 25 Cities VHF channels are accessible by non-VHF users via permanent or ad hoc patching capabilities. All agencies interested in using these frequencies, who are not currently participating in the 25 Cities effort, should contact the local FBI Radio Manager prior to programming any equipment. For frequencies and programming details or other questions regarding the project, contact Rob Zanger, U.S. Department of Justice, Wireless Management Office at 202.598.2000 or robert.m.zanger@usdoj.gov.

Information as of November 17, 2010.

۲

CITY	CHANNEL NAME
ATLANTA	ATL FIO (VHF P25 Voted System)
BALTIMORE	BA FIOLE3 (VHF P25 Voted System)
BOSTON	BPD FIO (VHF Voted System - Analog)
CHICAGO	CG-COM-N, CG-COM-C, CG-COM-S (VHF P25 Multicast Voted System)
CHICAGO	CG-TAC-N, CG-TAC-C, CG-COM-S (VHF P25 Multicast Voted System)
DALLAS	DFW EAST (VHF P25 Voted System)
DALLAS	DFW WEST (VHF P25 Voted System)
(con	tinued)

NIFOG 1_4.indd Sec1:44

۲

- 44 -



	۲	

The 25 Cities Project Fede	ral Interoperability Channels					
CITY	CHANNEL NAME					
DENVER	DEN 10-N, DEN 10-E, DEN 10-C, DEN 10-S, DEN 10-W (VHF P25 Multicast Voted System)					
EL PASO	EP FIO-W, EP FIO-E (VHF P25 Multi-cast Voted System)					
HAMPTON ROADS - NORFOLK	HRN FIO (VHF P25 Voted System)					
HARTFORD, CT	CFedcom-N, CFedcom-S (VHF P25 Multi-cast Voted System)					
	HNL FIO (VHF P25 Stand Alone 125 watt repeater)					
HONOLULU	HNL FIO2 (VHF P25 Stand Alone 125 watt repeater)					
	LE 4 (VHF P25 Transportable 125 watt repeater)					
	HNL FIRE (VHF Voted System – Analog)					
HOUCTON	HOU CMD (VHF P25 Voted System)					
HOUSTON	HOU PAT (VHF P25 Voted System)					
JACKSONVILLE	JAX FIO (VHF P25 Voted System)					
(con	tinued)					

NIFOG 1_4.indd Sec1:45

۲



۲

- 45 -

		(Ð		_

The 25 Cities Project Federal Interoperability Channels								
CITY	CHANNEL NAME							
	LA FIO1 (VHF P25 Voted System)							
LOS ANGELES	LA FIO2 (VHF P25 Voted System)							
	LA FIO3 (VHF P25 Voted System)							
MIAMI	MIA FIO (VHF P25 Voted System)							
MINNEAPOLIS/ST PAUL	FEDCOM-MP, FEDCOM-SP (VHF P25 Multicast Voted System)							
NEW ORLEANS	NOLA FIO (VHF P25 Voted System)							
NEW YORK	NYC FIO (NYC), NYC FIO-N (Orange- Putnam), NYC FIO-E (Suffolk), NYC FIO-S (Central NJ) (VHF P25 Multicast Voted system)							
	NYC FIO2 (VHF P25 Voted System)							
ORLANDO	ORL FIO (VHF P25 Voted System							
PHILADELPHIA	PH FIO (VHF P25 Voted System)							
(con	tinued)							

NIFOG 1_4.indd Sec1:46

- 46 -

۲



								I
			(

The 25 Cities Project Fede	ral Interoperability Channels
CITY	CHANNEL NAME
	STL CALL (VHF P25 Voted System)
	8CALL90(800 MHz Simulcast Voted Repeater System)
ST LOUIS	STL TAC (VHF P25 Voted System)
51 20015	8TAC91 (800 MHz Simulcast Voted Repeater System)
	All of the above repeaters can be networked together.
(con	tinued)

۲

NIFOG 1_4.indd Sec1:47

- 47 -

۲



	e	Ð	_

The 25 Cities Project Fede	ral Interoperability Channels				
CITY	CHANNEL NAME				
	SF MA U-A (UHF Stand Alone 125 watt repeater - Analog)				
	SF MA V-A (VHF Stand Alone 125 watt repeater - Analog)				
	CLEMARS 7 (LLAW1) (Low Band repeater				
	SF MA T-A (UHF-T Band Stand Alone 125 watt repeater - Analog)				
SAN FRANCISCO	8TAC94 (800 MHz Stand Alone 125 watt repeater- Analog)				
	SF FED-V (VHF P25 Stand Alone 125 watt repeater)				
	SF FED-U (UHF P25 Stand Alone 125 watt repeater)				
	All of the above repeaters can be networked together.				
	SF FED-ED, SF FED-ES, SF FED-ET, SF FED- EW (VHF P25 Multicast Voted System)				
TAMPA	TAM FIO (VHF P25 Voted System)				
	DC IO-1 (VHF P25 Voted System)				
WASHINGTON DC	DC IO2LE2 (VHF P25 Voted System)				

1/12/2011 2:37:41 PM

۲

NIFOG 1_4.indd Sec1:48

۲

۲

- 48 -

NOAA Weather Radio "All Hazards" Broadcasts

۲

NWR broadcasts National Weather Service (NWS) warnings, watches, forecasts and other non-weather related hazard information 24 hours a day. Channels WX1-WX7 are used in the US & Canada; channels WX8-WX9 are used for Canada Marine Weather broadcasts in some areas. These channels should be programmed as wideband FM (16K0F3E) RECEIVE ONLY. Some radio manufacturers number the US weather channels in the order they came into use, others number them in frequency order. For programming in land-mobile radios, frequency order is recommended.

162.400	WX1	(
162.425	WX2	We WX1-WX7 U
162.450	WX3	ather Radio S & Canada
162.475 162.500	WX4	Broadcasts - WX8-WX9 (
162.500	WX5	Weather Radio Broadcasts – Receive Only (WX1-WX7 US & Canada; WX8-WX9 Canada Marine Weather
162.525	WX6	ly ne Weather)
162.550	WX7	

۲

161.650	WX8	Marine 21B	_
161.775	9XW	Marine 83B	

- 49 -


۲


1/12/2011 2:37:41 PM


۲

NIFOG 1_4.indd Sec1:49

	ARRL	ARC	NCS	FEMA	FCC	DHS		
• - 50 -	American Radio Relay League	American National Red Cross 24-hr Disaster Operations Center	National Communications System NCC Radio Room/SHARES HF Radio	Federal Emergency Management Agency, National Response Coordination Center (NRCC) 202-646-2828 (general number for all ESFs – see next page)	Federal Communications Commission Communications and Crisis Management Center (CCMC) e-mail comm-ctr@fcc.gov	Main Number	COMMON COMMUNICATIONS REFERENCES Operations Center Telephone Numbers	

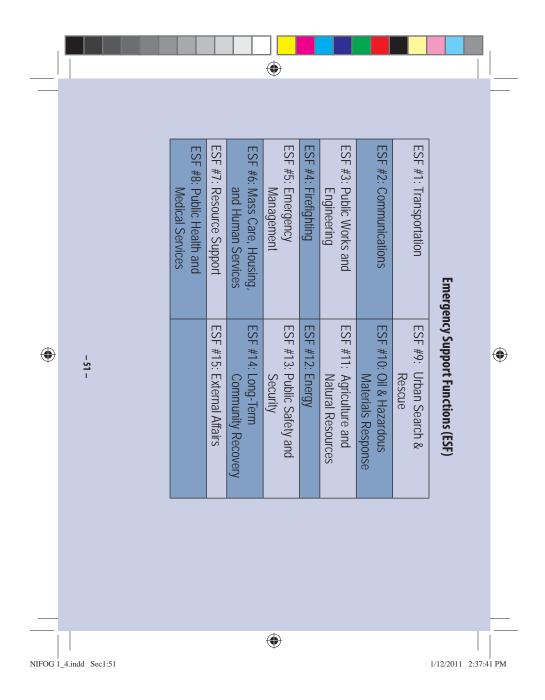


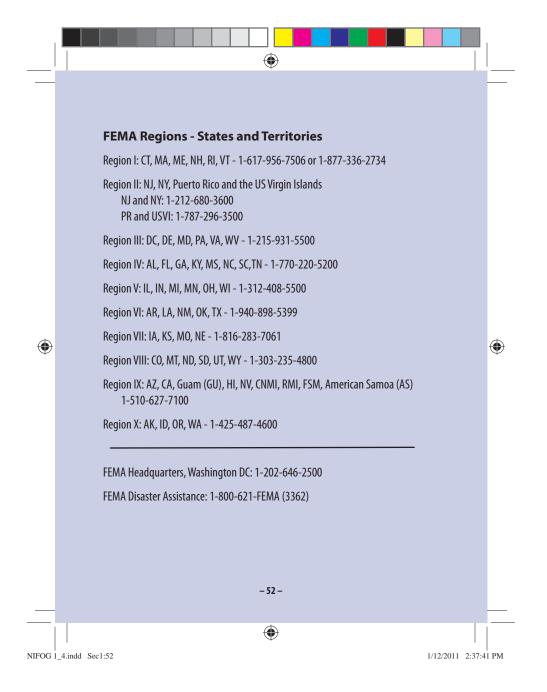


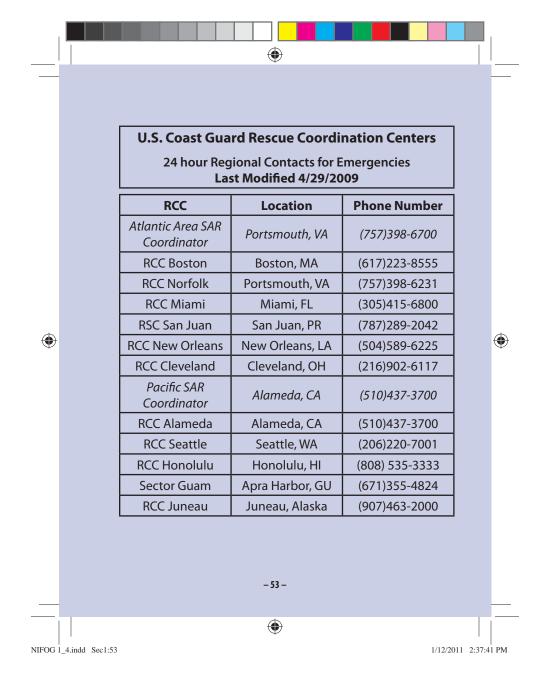


			CTCSS Tones	and Codes			
	Freq. <u>(Hz)</u>	Motorola <u>Code</u>	NIFC & CA Fire *	Freq. <u>(Hz)</u>	Motorola <u>Code</u>	NIFC & CA Fire *	
	67.0	XZ		136.5	4Z	4	
	69.3**	WZ		141.3	4A	13	
	71.9	XA		146.2	4B	5	
	74.4	WA		151.4	5Z	14	
	77.0	XB		156.7	5A	6	
	79.7	WB		162.2	5B	15	
	82.5	ΥZ		167.9	6Z	7	
	85.4	YA		173.8	6A		
	88.5	YB		179.9	6B		
)	91.5	ZZ		186.2	7Z		(
	94.8	ZA		192.8	7A	16	
	97.4	ZB	_	203.5	M1		
	100.0	1Z	9	206.5	8Z		
	103.5	1A	8	210.7	M2		
	107.2	1B	10	218.1	M3		
	110.9	2Z	1	225.7	M4		
	114.8 118.8	2A	11	229.1 233.6	9Z		
	118.8	2B 3Z	2	233.0 241.8	M5 M6		
	123.0	32 3A	12	250.3	M7		
	127.3	3B	3	250.3	ΟZ		
			PE tone list, us			ioncios	
			cope.org/macs			JEIICIES	
		some radios	cope.org/macs	S-UUCS/IVIAC	5-441-1.pui		

[DCS Co	des				
	Normal	Inverted	Nor.	Inv.	Nor.	Inv.	Nor.	Inv.	
	023	047	155	731	325	526	516	432	
Ī	025	244	156	265	331	465	523	246	
Ī	026	464	162	503	332	455	526	325	
Ī	031	627	165	251	343	532	532	343	
[036	172	172	036	346	612	546	132	
[043	445	174	074	351	243	565	703	
	047	023	205	263	364	131	606	631	
	051	032	212	356	365	125	612	346	
	053	452	223	134	371	734	624	632	
Į	054	413	225	122	411	226	627	031	
	065	271	226	411	412	143	631	606	
	071	306	243	351	413	054	632	624	
ļ	072	245	244	025	423	315	654	743	
	073	506	245	072	431	723	662	466	
	074	174	246	523	432	516	664	311	
Į	114	712	251	165	445	043	703	565	
ļ	115	152	252	462	446	255	712	114	
	116	754	255	446	452	053	723	431	
ļ	122	225	261	732	454	266	731	155	
	125	365	263	205	455	332	732	261	
ļ	131	364	265	156	462	252	734	371	
	132	546	266	454	464	026	743	654	
	134	223	271	065	465	331	754	116	
	143	412	274	145	466	662			
	145	274	306	071	503	162			
	152	115	311	664	506	073			
l	032	051	315	423					

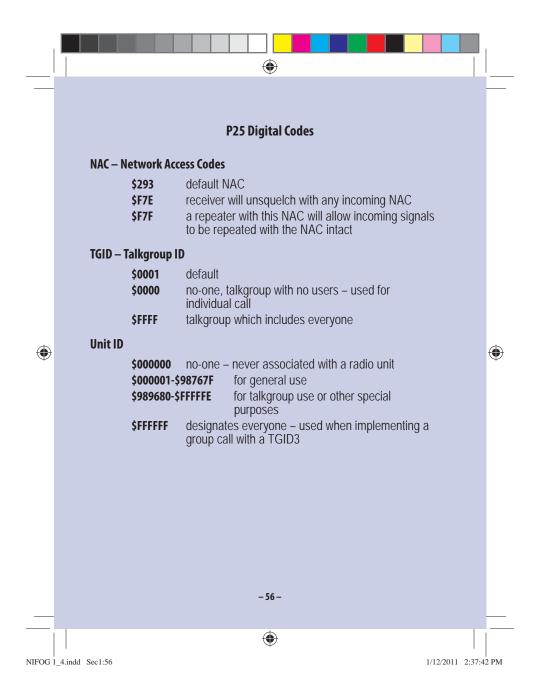


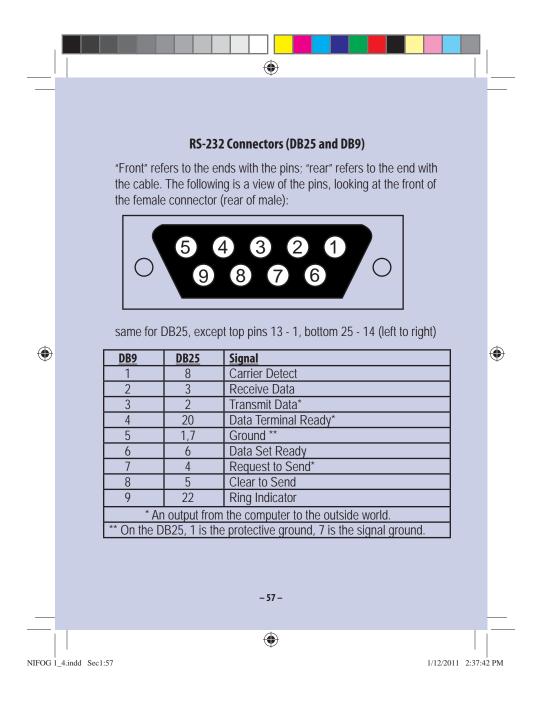


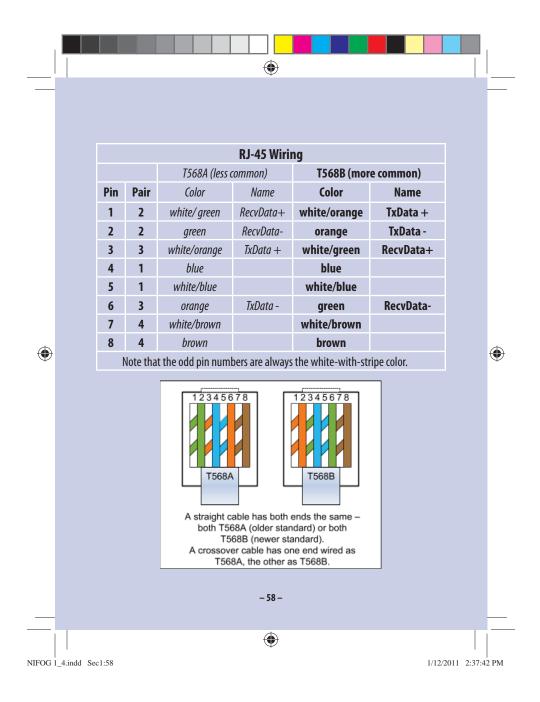



		Telephone Co	nnectors		
	up and look	s are from left to right, hol ing at the side that does r "Tip" and "Ring".	ding the plug with th		
	<u>Pin</u>	<u>RJ25</u>	<u>RJ14</u>	<u>RJ11</u>	
	1	Т3			
	2	Т2	T2		
	3	R1	R1	R1	
	4	T1	T1	T1	
	5	R2	R2		
	6	R3			
)					e
	Circuit	Twisted-Pair Colors	25-Pair Colors	Solid Colors	
	T1	White/Blue	White/Blue	Green	
	R1	Blue	Blue/White	Red	
	T2	White/Orange	White/Orange	Black	
	R2	Orange	Orange/White	Yellow	
	Т3	White/Green	White/Green	White	
	R3	Green	Green/White	Blue	
	Τ4	White/Brown	White/Brown	Orange	
	R4	Brown	Brown/White	Brown	


•		Tip, Ring 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25		Block Wiring 50 Pin Position 26,1 27,2 28,3 29,4 30,5 31,6 32,7 33,8 34,9 35,10 36,11 37,12 38,13 39,14 40,15 41,16 42,17 43,18 44,19 45,20 46,21 47,22 48,23 49,24 50,25	66 or 110 Block Position 1,2 3,4 5,6 7,8 9,10 11,12 13,14 15,16 17,18 19,20 21,22 23,24 25,26 27,28 29,30 31,32 33,34 35,36 37,38 39,40 41,42 43,44 45,46 47,48 49,50		•
			-	60 -			
			1	•			<u> </u>
NIFOG	1_4.indd Sec	1:60	, , , , , , , , , , , , , , , , , , ,	¥	1/12	 2/2011 2:37:4	 3 PM

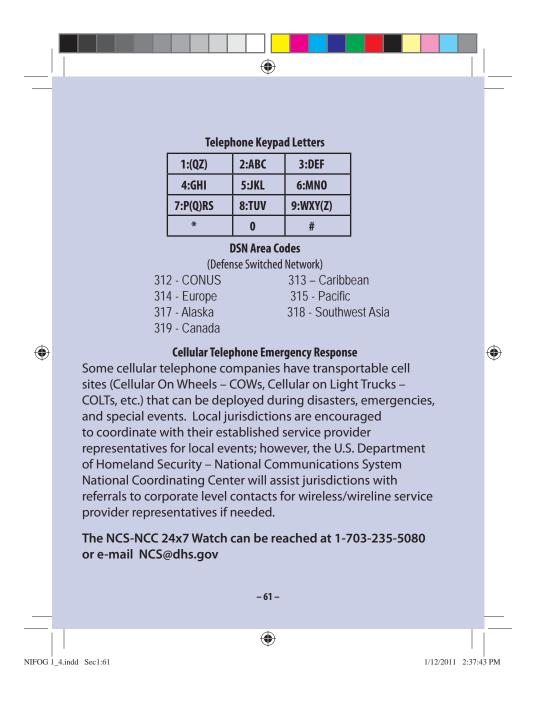


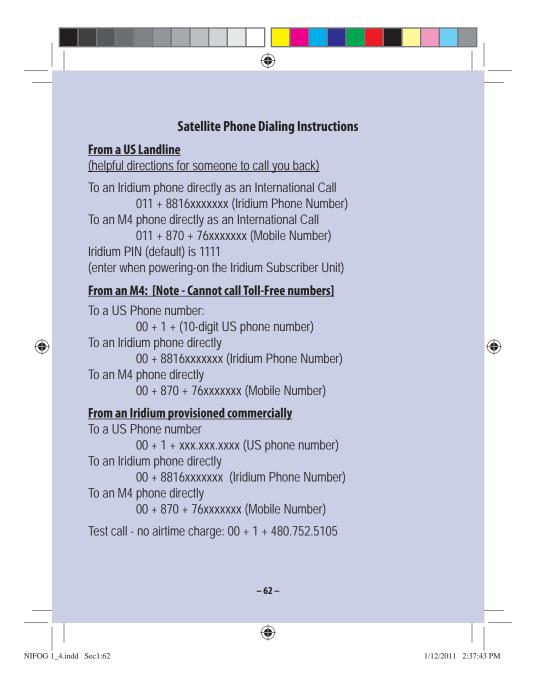


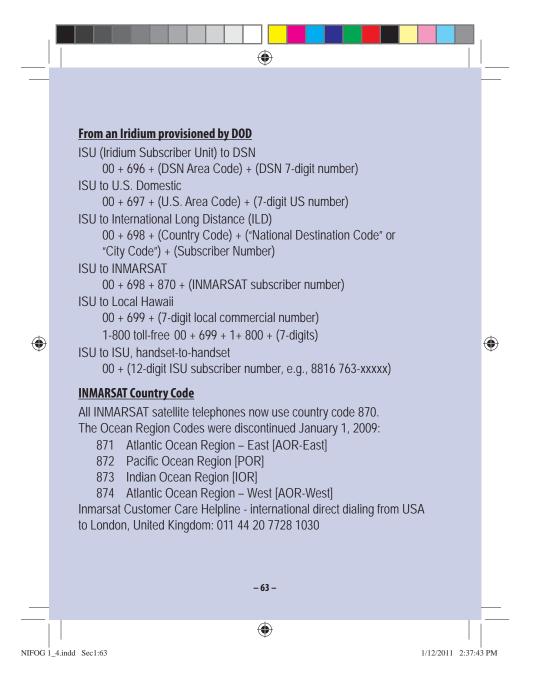


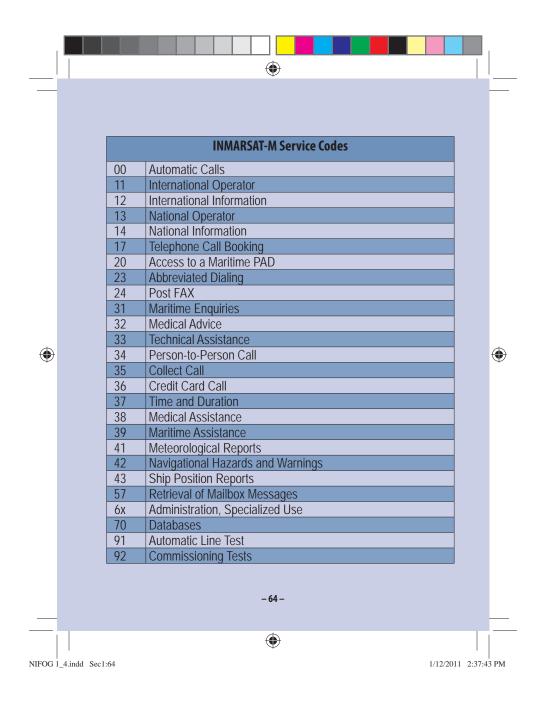

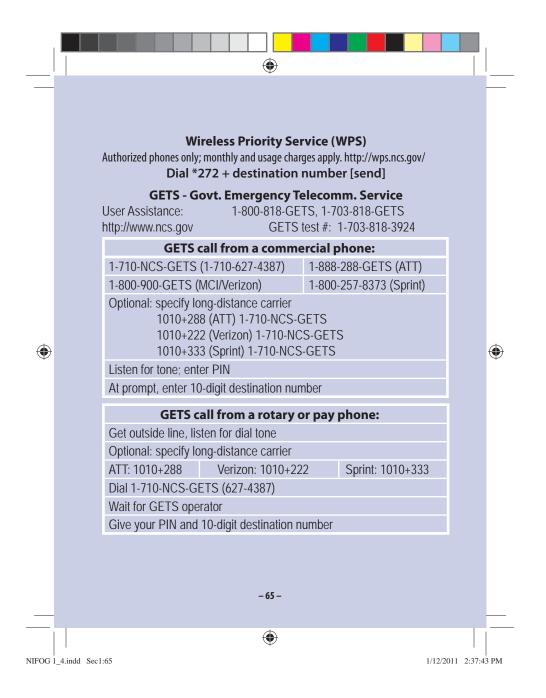

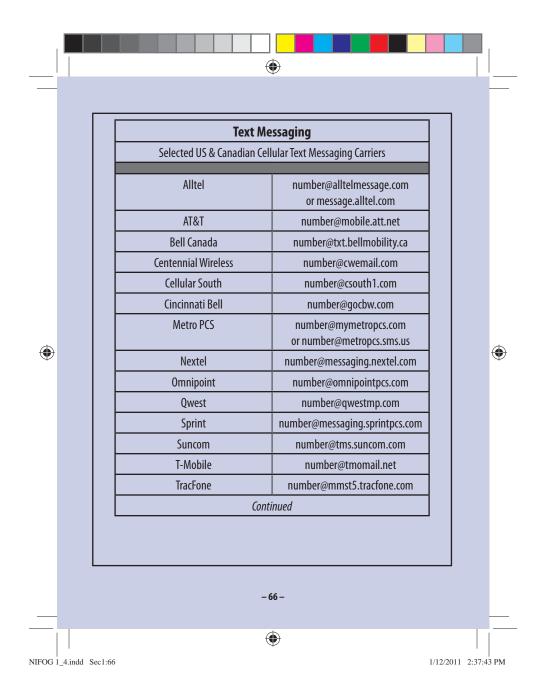

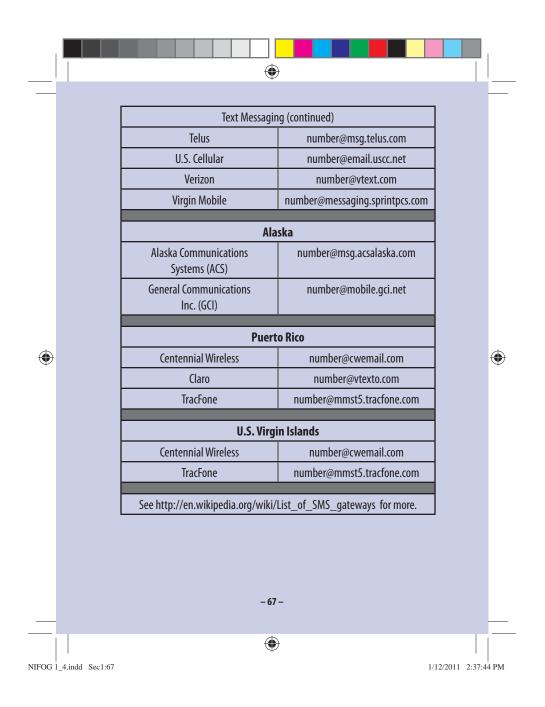



Line-of-Sight Formulas

Visual Line-of-Sight

Approximate distance in miles = $1.33 \times \sqrt{\text{(height in feet)}}$

Radio Line-of-Sight

 $\mathsf{D} = \sqrt{(2\mathsf{H}\mathsf{r})} + \sqrt{(2\mathsf{H}\mathsf{t})}$

Where:

D = approximate distance to radio horizon in miles

Hr = height of receive antenna in feet


Ht = height of transmit antenna in feet

Rx Ant. Height Tx Ant. Height Range Tx Ant. Height Range 8 10 5.5 150 21 10 20 5.5 200 23 11 30 5.5 300 28 12 40 5.5 400 32 13 50 5.5 500 35 5.5 16 75 750 42 17 100 5.5 1000 48

- 68 -







COMMONLY USED FREQUENCIES Aviation Frequencies

121.5 Emergency & Distress

122.9 SAR Secondary and Training

123.1 SAR

122.925 – for use only for communications with or between aircraft when coordinating natural resources programs of Federal or State natural resources agencies, including forestry management and fire suppression, fish and game management and protection and environmental monitoring and protection.

Typical Uses	Fixed Wing	Rotary Wing
Air-to-Air	122.750 F	122.925 M
	122.850 M	122.975 U
	122.925 M	122.850 M
	122.975 U	123.025 A
	123.075 U	123.075 U
Air-to-Ground		122.850 M
	122.850 M	122.925 M
	122.925 M	122.975 U
	122.975 U	123.025 A
	123.075 U	123.075 U

A - Helicopter air-to-air, air traffic control operations.

F – Fixed-wing air-to-air.

M – Multicom.

U – Unicom.

Ask FAA/FCC for emergency use of 123.3 or 123.5 (flight training).




۲



- 69 -





VHF Marine Channel Listing

This chart summarizes a portion of the FCC rules -- 47 CFR 80.371(c) and 80.373(f)

Type of Message	Appropriate Channels *
DISTRESS SAFETY AND CALLING - Use this channel to get the attention of another station (calling) or in emergencies (distress and safety).	16
INTERSHIP SAFETY - Use this channel for ship-to-ship safety messages and for search and rescue messages to ships and aircraft of the Coast Guard.	6
COAST GUARD LIAISON - Use this channel to talk to the Coast Guard (but first make contact on Channel 16).	22A
COAST GUARD - These channels are Coast Guard working channels, not available to commercial or non-commercial vessels for normal use.	21A, 23A, 81A, 83A
U.S. Government - Environmental protection operations.	81A
U.S. Government - This channel is a working channel for U.S. Government vessels and U.S. Government coast stations only.	82A
NONCOMMERCIAL - Working channels for voluntary boats. Messages must be about the needs of the ship. Typical uses include fishing reports, rendezvous, scheduling repairs and berthing information. Use Channels 67 and 72 only for ship-to-ship messages.	9 ⁶ , 67 ⁹ ,68, 69, 71 ⁸ , 72, 78A, 79A ⁴ , 80 ⁴

۲

NIFOG 1_4.indd Sec1:70

۲

۲

- 70 -



1													Ι.
					(Ð	-						

Type of Message	Appropriate Channels *
COMMERCIAL - Working channels for working ships only. Messages must be about business or the needs of the ship. Use channels 8, 67, 72 and 88A only for ship-to-ship messages.	1 ⁵ , 7A, 8, 9, 10, 11, 18A, 19A, 63 ⁵ , 67 ⁷ , 79A, 80A, 88A ¹
PUBLIC CORRESPONDENCE (MARINE OPERATOR) - Use these channels to call the marine operator at a public coast station. By contacting a public coast station, you can make and receive calls from telephones on shore. Except for distress calls, public coast stations usually charge for this service.	24, 25, 26, 27, 28, 84, 85, 86
PORT OPERATIONS - These channels are used in directing the movement of ships in or near ports, locks or waterways. Messages must be about the operational handling movement and safety of ships. In certain major ports, Channels 11, 12 and 14 are not available for general port operations messages. Use channel 20 only for ship-to-coast messages. Channel 77 is limited to intership communications to and from pilots	1 ⁵ , 5 ³ , 12, 14, 20, 63 ⁵ , 65, 66, 73, 74, 75 ¹⁰ ,76 ¹⁰ , 77
NAVIGATIONAL - (Also known as the bridge-to-bridge channel.) This channel is available to all ships. Messages must be about ship navigation, for example, passing or meeting other ships. You must keep your messages short. Your power output must not be more than one watt. This is also the main working channel at most locks and drawbridges.	13, 67

- 71 -

NIFOG 1_4.indd Sec1:71

۲



I											I
					(Ð					

Type of Message	Appropriate Channels *						
MARITIME CONTROL - This channel may be used to talk to ships and coast stations operated by state or local governments. Messages must pertain to regulation and control, boating activities, or assistance to ships.	17						
DIGITAL SELECTIVE CALLING - Use this channel for distress and safety calling and for general purpose calling using only digital selective calling techniques.	70						
WEATHER - On these channels you may receive weather broadcasts of the National Oceanic and Atmospheric Administration. These channels are only for receiving. You cannot transmit on them.	WX-1 through WX-7						
Footnotes							
1. Not available in the Great Lakes, St. Lawrence Seaway, or the Puget the Strait of Juan de Fuca and its approaches.	Sound and						
2. Only for use In the Great Lakes, St Lawrence Seaway, and Puget Sound and the Strait of Juan de Fuca and its approaches.							
3. Available only in the Houston and New Orleans areas.							
4. Available only in the Great Lakes.							
5. Available only in the New Orleans area.							
6. Available for intership, ship, and coast general purpose calling by noncommercial ships.							
7. Available only In the Puget Sound and the Strait of Juan de Fuca.							

NIFOG 1_4.indd Sec1:72

۲

۲

- 72 -



•																				

Type of Message	Appropriate Channels *									
8. Available for port operations communications only within the U.S. designated VTS radio protection area of Seattle (Puget Sound). Norma not exceed 1 watt.										
9. Available for navigational communications only in the Mississippi River/ Southwest Pass/Gulf outlet area.										
10. Available for navigation-related port operations or ship movement only. Output power limited to 1 watt.										
* "A" indicates simplex use of the ship station transmit frequency of a duplex channel. Used in U.S. waters only.	n international									
December 21, 2010 Adapted from http://wireless.fcc.gov/services/index.htm?job=service_bandplan&id=	=ship_stations									

Shipboard repeaters: 457.525 457.550 457.575 457.600 MHz Inputs are +10.225 MHz (foreign vessels may use +10.0 MHz offset – not permitted in U.S. waters).

Maritime freqs. assignable to aircraft:


(HF) 2.738 2.830 3.023 4.125 5.680 MHz (VHF) channels 6 8 9 16 18A 22A 67 68 72 & 88A See 47CFR80.379 for restrictions



۲

- 73 -





VHF Marine Channels & Frequencies

Channel Number *	Ship Transmit MHz	Ship Receive MHz	Use								
01A	156.050	156.050	Port Operations and Commercial, VTS. Avail- able only in New Orleans/Lower Mississippi area								
05A	156.250	156.250	Port Operations or VTS in the Houston, New Orleans and Seattle areas								
6	156.300	156.300	Intership Safety								
07A	156.350	156.350	Commercial								
8	156.400	156.400	Commercial (Intership only)								
9	156.450	156.450	Boater Calling. Commercial and Non- Commercial								
10	156.500	156.500	Commercial								
11	156.550	156.550	Commercial. VTS in selected areas								
12	156.600	156.600	Port Operations. VTS in selected areas								
	•		ip station transmit frequency of an in U.S. waters only.								

Source: http://www.navcen.uscg.gov/?pageName=mtVhf

۲

۲

NIFOG 1_4.indd Sec1:74

- 74 -

1/12/2011 2:37:45 PM

_																				

Channel Number *	Ship Transmit MHz	Ship Receive MHz	Use							
13	156.650	156.650	Intership Navigation Safety (Bridge-to- bridge). Ships >20m length maintain a listening watch on this channel in US waters.							
14	156.700	156.700	Port Operations. VTS in selected areas.							
15		156.750	Environmental (Receive only). Used by Class C EPIRBs.							
16	156.800	156.800	International Distress, Safety and Calling. Ships required to carry radio, USCG, and most coast stations maintain a listening watch on this channel.							
17	156.850	156.850	State Control							
18A	156.900	156.900	Commercial							
19A	156.950	156.950	Commercial							
20	157.000	161.600	Port Operations (duplex)							
20A	157.000	157.000	Port Operations							
21A	157.050	157.050	U.S. Coast Guard only							
* "A" indicates simplex use of the ship station transmit frequency of an international duplex channel. Used in U.S. waters only.										

NIFOG 1_4.indd Sec1:75

- 75 -

۲

1/12/2011 2:37:45 PM



	-		

Channel Number *	Ship Transmit MHz	Ship Receive MHz	Use
22A	157.100	157.100	Coast Guard Liaison and Maritime Safety Information Broadcasts. Broadcasts announced on channel 16.
23A	157.150	157.150	U.S. Coast Guard only
24	157.200	161.800	Public Correspondence (Marine Operator)
25	157.250	161.850	Public Correspondence (Marine Operator)
26	157.300	161.900	Public Correspondence (Marine Operator)
27	157.350	161.950	Public Correspondence (Marine Operator)
28	157.400	162.000	Public Correspondence (Marine Operator)
63A	156.175	156.175	Port Operations and Commercial, VTS. Available only in New Orleans/Lower Mississippi area.
65A	156.275	156.275	Port Operations
66A	156.325	156.325	Port Operations
67	156.375	156.375	Commercial. Used for bridge-to-bridge communications in lower Mississippi River. Intership only.
* "A" indicates simplex use of the ship station transmit frequency of an international duplex channel. Used in U.S. waters only.			

NIFOG 1_4.indd Sec1:76

۲

- 76 -



	۲)		_

Channel Number *	Ship Transmit MHz	Ship Receive MHz	Use
68	156.425	156.425	Non-Commercial
69	156.475	156.475	Non-Commercial
70	156.525	156.525	Digital Selective Calling (voice communications not allowed)
71	156.575	156.575	Non-Commercial
72	156.625	156.625	Non-Commercial (intership only)
73	156.675	156.675	Port Operations
74	156.725	156.725	Port Operations
77	156.875	156.875	Port Operations (intership only)
78A	156.925	156.925	Non-Commercial
79A	156.975	156.975	Commercial. Non-Commercial in Great Lakes only
80A	157.025	157.025	Commercial. Non-Commercial in Great Lakes only
81A	157.075	157.075	U.S. Government only - Environmental protection operations.
82A	157.125	157.125	U.S. Government only
* "A" indicates simplex use of the ship station transmit frequency of an international duplex channel. Used in U.S. waters only.			

NIFOG 1_4.indd Sec1:77

۲

- 77 -



I				
		۲		


Channel Number *	Ship Transmit MHz	Ship Receive MHz	Use	
83A	157.175	157.175	U.S. Coast Guard only	
84	157.225	161.825	Public Correspondence (Marine Operator)	
85	157.275	161.875	Public Correspondence (Marine Operator)	
86	157.325	161.925	Public Correspondence (Marine Operator)	
87A	157.375	157.375	Public Correspondence (Marine Operator)	
88A	157.425	157.425	Commercial, intership only.	
AIS 1	161.975	161.975	Automatic Identification System (AIS)	
AIS 2	162.025	162.025	Automatic Identification System (AIS)	
* "A" indicates simplex use of the ship station transmit frequency of an international duplex channel. Used in U.S. waters only.				

NIFOG 1_4.indd Sec1:78

- 78 -

۲





Multi-Use Radio Service (MURS)

151.820 MHz

151.880 MHz

151.940 MHz

154.570 MHz (shared with business band)

154.600 MHz (shared with business band)

Maximum power output 2 watts.

Narrowband on 151 MHz frequencies, narrowband or wideband on the 154 MHz frequencies.

External gain antennas may be used (must be no more than 60 feet above ground or 20 feet above the structure on which it is mounted). ۲

Voice or data (but not store-and-forward packet operation).

Personal or business use.

No license required.




۲

- 79 -







GMRS Frequencies Repeater outputs (inputs are +5 MHz):

462.550 462.575 462.600 462.625 462.650 462.675* 462.700 462.725 * nationwide traveler's assistance; if CTCSS is required, try 141.3 Hz.

Simplex prohibited on repeater inputs.

Interstitial frequencies (simplex, not more than 5 watts): 462.5625 .5875 .6125 .6375 .6625 .6875 .7125 (shared with FRS)

FRS Frequencies (Channels 1-14)

462.5625/5875/6125/6375/6625/6875/7125 (shared with GMRS) 467.5625/5875/6125/6375/6625/6875/7125

Ĺ	4		
7		₽7 -	
ľ	~	\sim	

CB Frequencies

Ch Ch Ch MHz Ch MHz Ch MHz MHz MHz 1 26.965 2 26.975 3 26.985 4 27.005 5 27.015 6 27.025 7 27.035 8 27.055 9 27.065 10 27.075 11 12 27.105 27.115 14 27.125 15 27.135 27.085 13 27.185 27.205 16 27.155 17 27.165 18 27.175 19 20 21 27.215 22 27.225 23 27.255 24 27.235 27.245 25 27.265 27.295 26 27 27.275 28 27.285 29 30 27.305 31 27.315 32 27.325 33 27.335 34 27.345 35 27.355 36 27.365 37 27.375 38 27.385 39 27.395 40 27.405 * 26.995 * 27.045 * 27.095 * 27.145 * 27.195 * Remote Control Channels


۲

NIFOG 1_4.indd Sec1:80



- 80 -





Common Business Frequencies

IS=Special Industrial IB=Business ZA=GMRS GMRS (ZA) freqs. are not for IS/IB use.

27.49	IB	Itinerant
35.04	IB	Itinerant
43.0400	IS	Itinerant
151.5050	IS	Itinerant
151.6250	IB	RED DOT Itinerant
151.9550	IB	PURPLE DOT
152.8700	IS	Itinerant
154.5700	IB	BLUE DOT (also MURS)
154.6000	IB	GREEN DOT (also MURS)
158.4000	IS	Itinerant
451.8000	IS	Itinerant
456.8000	IS	Itinerant
462.550 - 462.725	ZA	(see previous page)
467.550 - 467.725	ZA	(see previous page)
462.5750	ZA	WHITE DOT
462.6250	ZA	BLACK DOT
462.6750	ZA	ORANGE DOT
462.7125	ZA	Radio Shack HTs (GMRS)
464.5000	IB	BROWN DOT Itinerant 35w.
464.5500	IB	YELLOW DOT Itinerant 35w.
467.7625	IB	J DOT
467.8125	IB	K DOT

۲

NIFOG 1_4.indd Sec1:81

۲

- 81 -



۲

467.8500	IB	SILVER STAR
467.8750	IB	GOLD STAR
467.9000	IB	RED STAR
467.9250	IB	BLUE STAR
469.5000	IB	Simplex or input to 464.500 if
		repeater. Itinerant 35 w. max
469.5500	IB	Simplex or input to 464.550 if repeater. Itinerant 35 w. max

GMRS (ZA) freqs. are often mistaken for business freqs., due to their color-dot designations.

Railroad Frequencies

161.205 Railroad Police Mutual Aid

160.215(ch.7)-161.565(ch.97), every 15 kHz. Ch. 2-6 are used in Canada only: 159.810 159.930 160.050 160.185 160.200 452.325 / 457.325 452.375 / 457.375 452.425 / 457.425 452.475 / 457.425 452.875 / 457.875 Shared Motor Carrier & Railroad: 452.900 / 457.900

- 82 -


۲

452.925 / 457.925 452.950 / 457.950

NIFOG 1_4.indd Sec1:82

1/12/2011 2:37:46 PM

۲



SAR (Search And Rescue) Frequencies

Land SAR

Typical freqs. are: 155.160, .175, .205, .220, .235, .265, .280, or .295 If CTCSS is required try 127.3 Hz (3A).

Air SAR

3023, 5680, 8364 kHz (lifeboat/survival craft),

4125 kHz (distress/safety with ships and coast stations)

121.5 MHz emergency and distress

122.9 MHz SAR secondary & training

123.1 MHz SAR primary

Water SAR

156.300 (VHF Marine ch. 06) Safety and SAR 156.450 (VHF Marine ch. 09) Non-commercial supplementary calling

- 156.800 (VHF Marine ch. 16) DISTRESS and calling
- 156.850 (VHF Marine ch. 17) State control

157.100 (VHF Marine ch. 22A) Coast Guard Liaison

VHF Marine Channels

6, 9, 15, 16, 21A, 22A (USCG Liaison), 23A, 81A, 83A

USCG Auxiliary

138.475, 142.825, 143.475, 149.200, 150.700

USCG/DOD Joint SAR

345.0 MHz AM initial contact, 282.8 MHz AM working

Military SAR

40.50 wideband FM US Army/USN SAR 138.450 AM 138.750 AM USAF SAR





- 83 -



۲

